

Commissioning

- Reconnect the LED modules and refit the mirror panels. Ensure that the seals are correctly located before securing.
- Fit the shelf brackets in place and gently locate the shelves on top of the brackets.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.
- Activate your new LED mirror by swiping your hand in front of the sensor.

Shaver Socket Instructions

- The shaver socket is powered by a 20W isolating transformer and is only intended for use with electric shavers, electric toothbrush chargers and similar products.
- Any appliance connected to the socket must not exceed the 20W power output as this could cause damage and overheating to occur.
- Always check your appliance instructions to ensure the power requirements are less than 20W.

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- Mirror – Use a damp cloth or a propriety glass cleaner. Do not use abrasive materials as these will damage the finish.

LED Module

The LED module of this luminaire is not replaceable, when the LED module reaches its end of life the whole luminaire shall be replaced'


Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

Live Voltages may be present in this unit even when turned off or when completely disconnected. For your safety, **always switch off the supply** before changing lightbulbs, or cleaning.




The mirror must be replaced immediately should it become cracked or damaged. This fitting must not be used without the mirror in place.

Instruction leaflet

Revelo Bathroom Cabinet

60894

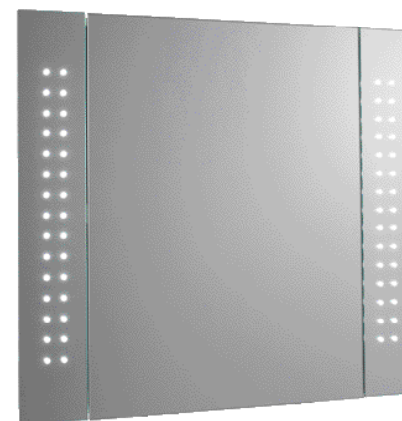

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

This product is not suitable for dimming.

This product is rated at IP44.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Specification

Voltage:	240V 50Hz a.c.
Lamp:	2 x 5W LED (daylight white - 16lm per LED)
IP rating:	44
Shaver socket:	115V - 240V dual socket

Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Cables in walls must be protected using suitable conduit or plastic trunking.
- The mains supply cable must have a minimum cross sectional area of 1.0mm².
- This product has special protection against the ingress of moisture and is IP44 rated.
- The cable entry hole is on the left hand-side of the product and is accessed by removing the mirror panel.
- This product is fitted with a no touch infra-red switch, helping to keep the mirror clear of fingerprints. When installing the cabinet, the sensor switch must be at least 150mm from an adjacent wall or obstruction to ensure the switch can function properly.

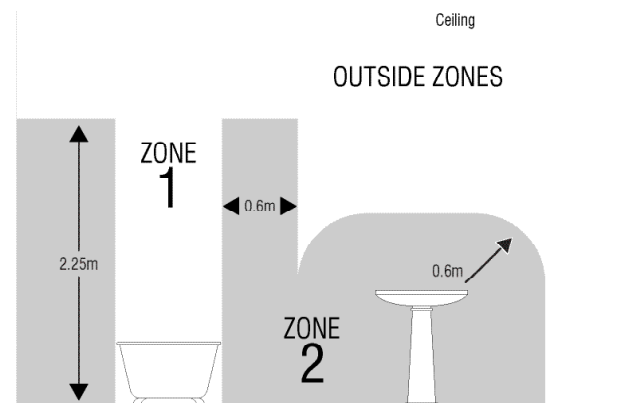

This product is suitable for use in Zone 2 and outside Zones of a bathroom. See diagram. If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used, in accordance with IEE regulations.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**


An assistant may be required to aid installation of this product.

- Remove the mirror panels either side of the door by removing the 4 screws (two on the top and bottom of the product). The LED modules can be disconnected for ease of installing the cabinet.

- Hold the cabinet in place and mark the position of the holes. Ensure that the product is level.
- Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- Pierce grommet and pass the supply cable through the hole in the wall back.
- Fix the product into position.

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

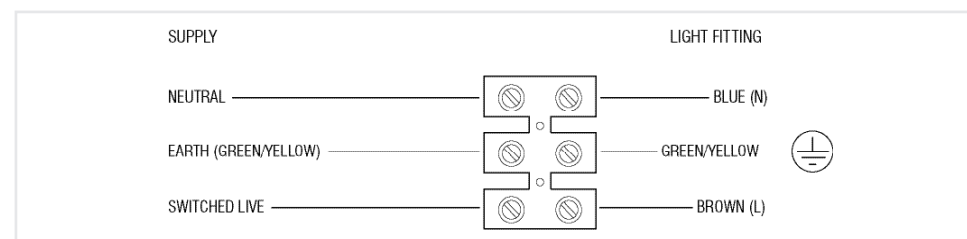

Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.