


STRIP IP67 5M 3500K 12V 3W/M 200LM/M 30LED/M 10MM WIDTH 115 BEAM
BAG PACK INTEGRAL

ILSTWHIC010E

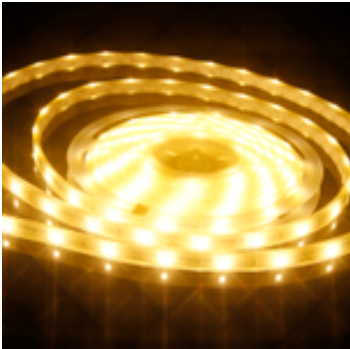

General

Warranty (Years)	3
Product Type	White strip

Physical Data

Max Run Length (m)	5
Construction	LED surface mounted on to strip, silicone poured on to seal

Light Data

Lumens per meter (lm/m)	200
LEDs per meter	30
LED Size (mm)	3528
Correlated Colour Temperature (CCT) (K)	3500
Colour Temperature Name	Warm White
Beam Angle (Range)	90 to 160
Colour Type	White
Lifetime (hours)	13000
LED Type	Surface mounted device (SMD)
Colour Rendering Index (CRI)	80
Beam Angle	115
Lumens Range	1 to 100

Electrical Data

Power Consumption per meter (W/m)	3
-----------------------------------	---

Environmental

IP Rating (Ingress Protection)	IP67
--------------------------------	------

Electrical Data, Environmental

EN	EN-62031
LVD Certified	Yes

Product Specification

Warranty (Years)	3
Housing Material	PCB

Key Features

Bullet 1	Warm white
Bullet 2	12V DC Constant Voltage
Bullet 3	3W per metre
Bullet 4	LED size 35:28

Environmental Specification

Minimum operating temperature (degrees Celcius)	-25
Maximum operating temperature (degrees Celcius)	60