

### STRIP IP67 5M 3500K 12V 6W/M 325LM/M 60LED/M 10MM WIDTH 115 BEAM BAG PACK INTEGRAL

ILSTWHIC012E



THIS ITEM IS NOW UPGRADED OR DISCONTINUED. CONTACT US TO FIND A REPLACEMENT PRODUCT. This warm white LED strip has 60 LEDs per metre and is constructed using high quality materials to ensure a consistent light and colour across the strip. This LED strip is IP67 rated and is suitable for indoor and outdoor applications. Each 5m reel is supplied with an easy-to-follow installation guide and 20 mounting clips. Additional accessories are available to purchase. A suitable constant voltage driver is required, depending on the total power requirement of the connected strip(s).

#### Details

<b>Quick Order Code:</b>	729835
<b>Barcode:</b>	5055788220732
<b>Category:</b>	Strips
<b>Range Name:</b>	White Strip
<b>Product Type:</b>	White strip
<b>Market Segment:</b>	Residential indoor, outdoor
<b>Warranty (Years):</b>	3
<b>CE RoHS:</b>	Yes

#### Physical Data

<b>Product Width (mm):</b>	10
<b>Product Weight (g):</b>	475
<b>Material:</b>	PCB
<b>Construction:</b>	LED surface mounted on to strip, silicone poured on to seal
<b>Strip Cut Points (mm):</b>	50
<b>Max Run Length (m):</b>	5
<b>Placement / Application:</b>	Decorative indoor, outdoor
<b>Strip length (M):</b>	5
<b>Strip Width (mm):</b>	10

#### Electrical Data

<b>Power Consumption per meter (W/m):</b>	6
<b>Voltage (V):</b>	12
<b>Watts per metre:</b>	3.1W - 6w



<b>Dimming:</b>	Dimmable
<b>Driver Included:</b>	No
<b>Electric Current:</b>	DC
<b>EN:</b>	EN-62031
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous efficacy (lm/W):</b>	54
<b>Lumens per meter (lm/m):</b>	325
<b>Correlated Colour Temperature (CCT) (K):</b>	3500
<b>Colour Temperature Name:</b>	Warm White
<b>Beam Angle:</b>	115
<b>Colour Rendering Index (CRI):</b>	80
<b>Colour Type:</b>	White
<b>LED Size (mm):</b>	3528
<b>LED Type:</b>	Surface mounted device (SMD)
<b>LEDs per meter:</b>	60
<b>Lifetime (hours):</b>	13000
<b>Reel Length (m):</b>	5

## Environment

<b>EN:</b>	EN-62031
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>New Energy Rating:</b>	G
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP67
<b>Lowest Operating Temperature (°C):</b>	-25
<b>Maximum Operating Temperature (°C):</b>	60

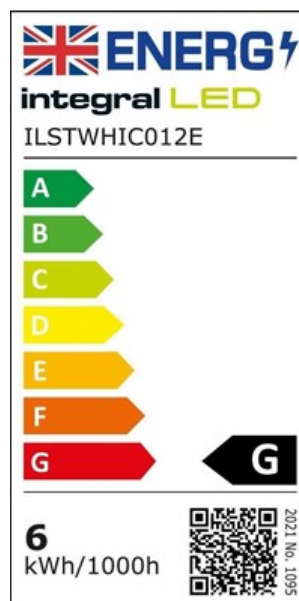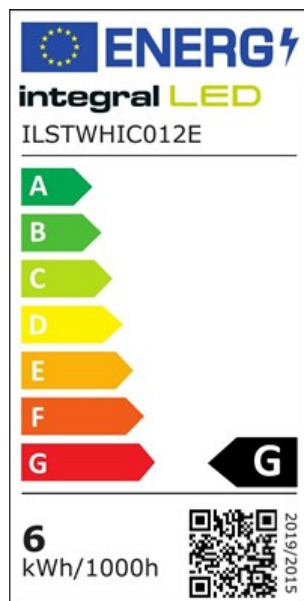

## Packaging

<b>Package Weight (g):</b>	481
<b>Package Length (mm):</b>	205
<b>Package Width (mm):</b>	230

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

**Package Depth (mm):**

**11**