


## Wiring

- Having correctly identified the wiring from your existing light fitting, pull the mains wire through the hole and connect to the quick fit connection block in the following way.

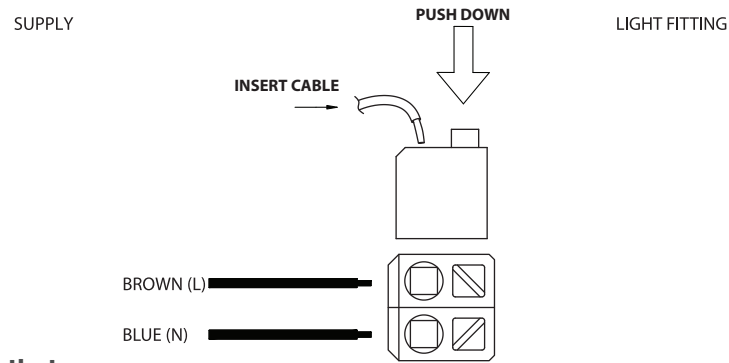


## Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

## Care and Safety

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- For your safety, always switch off the supply before cleaning.

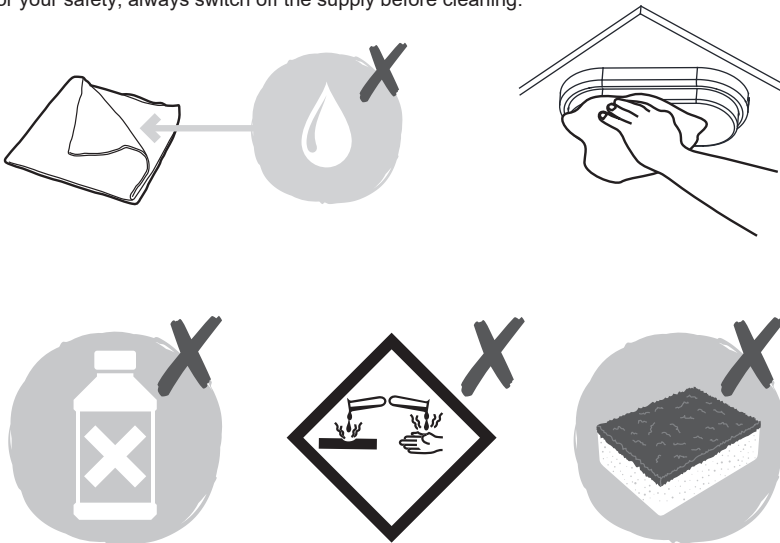

Iss1 05/09/2018

## Instruction leaflet

# Budget bulkhead Oval

78620, 78845, 78846, 78847

78621, 78848, 78849, 78850



CE

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all of the parts listed.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

The mains supply cable must have a minimum cross sectional area of 1.0mm².

The products can be wall or ceiling mounted. If wall mounting ensure that the power supply is at the bottom.

Cables must be protected using suitable conduit or plastic trunking.

The external flexible cable or cord of this luminaire cannot be replaced . if the cord is damaged, the luminaire must be destroyed.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Technical data

Supply Voltage:	240 V~, 50 Hz
Bulb Type:	LED (12 W) SMD 2835D 4000K - (78620) LED (18 W) SMD 2835D 4000K - (78621)
	The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
CE	Conformity with all relevant EC Directive requirements.
	The power supply is Double Insulated and does not require connection to an Earth circuit.
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.
	This product is not suitable for dimming.
	Caution! Risk of electric shock!
IP54	This product is rated at IP54.

Layout

- Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between each light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- This product is suitable for use in outside Zones of a bathroom only. See diagram.
- If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used - in accordance with IEE regulations.

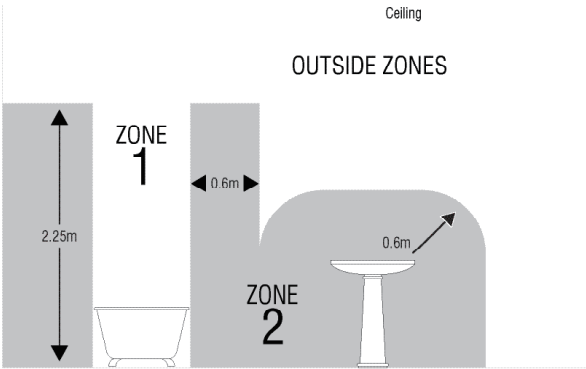

Installation

- Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.
- Note that the switch is closed before installation.
  - The ceiling surface must be flat and smooth to ensure a good fit.
  - Ensure the wall is capable of holding the weight of the product, or if fitting to a ceiling, ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
  - The bezel can be replaced, but be careful to match the same color:  
78620——78845/78846/78847  
78621——78848/78849/78850
  - Ensure that the screws and cable entry points are sealed to maintain the IP rating of the product.
  - Your light is now ready for use.

