



DIN Rail terminal blocks / DK..N-PE series

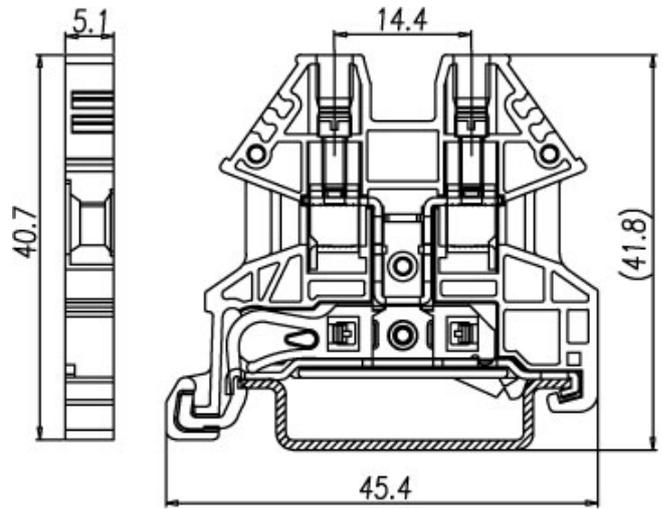

DK2.5N-PE

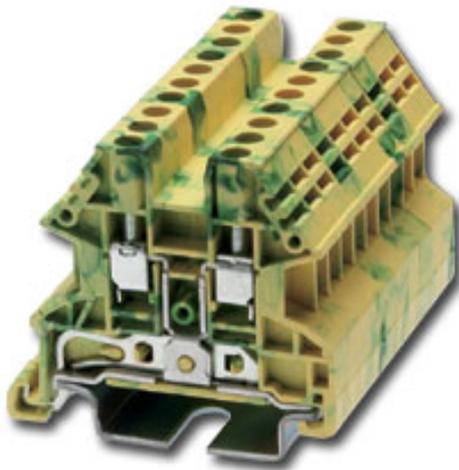

| Approval | | |
|------------------------------------------------------------|--------------------|-----|
| Technical Data | UL | IEC |
| Rated voltage | | |
| Rated current | | |
| Conductor cross-section, solid (AWG / mm ²) | 28~12 / 0.14~2.5 | |
| Conductor cross-section, flexible (AWG / mm ²) | 28~12 / 0.14~2.5 | |
| Rated impulse withstand voltage | 6KV | |
| Torque (N-m) | 0.4 | |
| Screw | M2.5 | |
| Wire strip length | 8~10mm | |
| Insulating material | PA | |
| TxHxW (mm) | 5.1 x 40.95 x 45.4 | |
| Optional color | Cat. No. | |
| ● | | |
| ● | | |
| ● | | |
| ● | | |



| | Accessories | Cat. No. |
|------------------|-------------|------------|
| End cover | | DK2.5NC-PE |
| Partition | | |
| Small partition | | |
| Insertion bridge | | |
| Insertion bridge | | |
| Screw-on bridge | | |
| Marking label | | TM26 |
| Mounting Rail | | TS-35 |
| Tool | | |
| | | |
| | | |
| | | |