


Product Code: CLRCDP036

Luckinslive 433612861

Description: 13A 2 Gang Type A Passive RCD Switched Socket Outlet

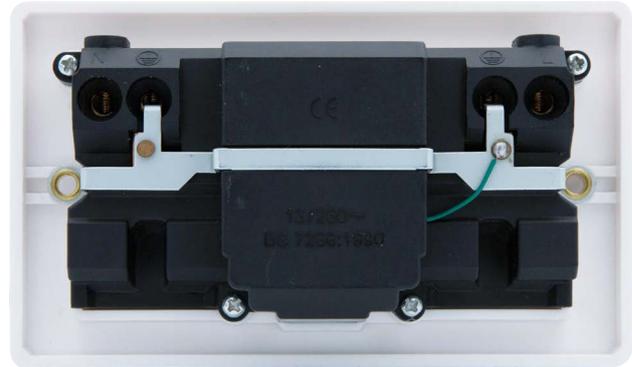

General Information

Dimensions (mm)	140 (W) x 80 (H) x 42 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
Style	Metal Clad	
Colour	Grey	
Insert Colour	White	
Materials	Front Plate & Mounting Box:	Insert & Rocker Switch: Urea
	Electrophoretically Coated Steel	Terminals: Brass
	Rear Housing: Urea	Contacts: Silver "on-lay" Copper / Brass
	Terminal Screws: Steel & Yellow Passivated	Earth Strap: Mild Steel
	Internal Busbars: Formed Pressed Brass	
	PCB: Mixed Components	
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
Breaking Capacity (A)	250 (Earth Leakage)	
Through Fault Withstand (A)	1500	
Trip Speed	Less than 300ms at 30mA (x1) Residual Current	
Termination Type	Screw	
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm) 2
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 3 x 4	
Single Pole Switched	Yes	
Twin Earth Terminals	Yes	
Supplied Back Box Depth (mm)	40	
Back Box Knockouts - Total (mm)	7 x Ø20	Back Box Knockouts - Bottom (mm) 2 x Ø20
Back Box Knockouts - Top (mm)	3 x Ø20	Back Box Knockouts - Sides (mm) 1 x Ø20
Back Box Knockouts - Rear (mm)	None	
Back Box Earth Terminal Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	Warranty - Electronics (Years) 2

Standards BS 1363-2, IEC 62640, BS 7288, SASO 2203, IEC 61000-6-1 & IEC 61000-6-3

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
 The Cable must be routed through the most suitable entry point of the mounting box. When using the Metal Clad back box the top or bottom central knock out should not be used. If the central knock out is required then the CL088 50mm deep backbox may be used.

