


**DATA SHEET**

# LEXINGTON


## Lexington Exit Box 3W LED Maint. 3Hr Legend

3 Hour Maintained / Non-Maintained Exit Box  
Supplied With Arrow Down Legend  
Maintained or Non Maintained Options

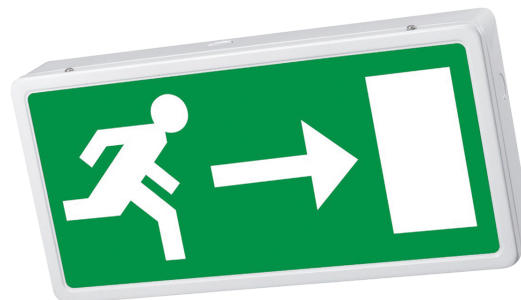

| GENERAL INFORMATION            |                          |
|--------------------------------|--------------------------|
| Product Code                   | NLE/3/LED/M3             |
| Product Range                  | Lexington                |
| Product Category               | Emergency                |
| Fixing Method                  | Surface                  |
| IP Rating                      | 20                       |
| IK Rating                      | N/A                      |
| Warranty                       | 5 Years Unlimited        |
| DIMENSION/WEIGHT               |                          |
| Dimensions (L x W x H) (mm)    | L=undefined, W=60, H=190 |
| Cut-out Size (mm)              | N/A                      |
| Product Weight (Kg)            | 1.6                      |
| CONSTRUCTION                   |                          |
| Body Material                  | Steel                    |
| Body Colour                    | White                    |
| Optical Material               | N/A                      |
| Optical Finish                 | N/A                      |
| Termination                    | 4-Pole Terminal Block    |
| Driver - Integral or Remote    | Integral                 |
| PACKAGING                      |                          |
| Carton Dimensions (mm)         | N/A                      |
| Quantity per Outer Carton      | N/A                      |
| Total Weight incl. Carton (Kg) | N/A                      |

| LUMINAIRE PERFORMANCE        |               |
|------------------------------|---------------|
| Energy Rating                | N/A           |
| Luminaire Lumens (lm)        | N/A           |
| Power Consumption (W)        | N/A           |
| Efficacy (l.lm/c.W)          | 0             |
| Operating Temp. (Min/Max)    | 0°C - 25 °C   |
| LIGHT SOURCE                 |               |
| Type                         | LED           |
| Correlated Colour Temp.      | N/A           |
| Colour Rendering Index (CRI) | N/A           |
| Lumen Depreciation           | L80 100000    |
| SDCM                         | N/A           |
| ELECTRICAL INPUT             |               |
| Voltage (V)                  | 220-240V AC   |
| Operating Frequency          | 50            |
| In Rush                      | N/A           |
| Drivers per MCB*             | N/A           |
| Class                        | Class 1       |
| Power Factor                 | N/A           |
| Cable Entry                  | Side / Back   |
| ELECTRICAL OUTPUT            |               |
| Forward Current (mA)         | N/A           |
| Forward Voltage (Vf)         | N/A           |
| EMERGENCY DATA               |               |
| Mode of Operation            | Maintained    |
| Battery Duration             | 3 Hours       |
| Battery Type                 | NiCd          |
| Battery Specification        | 3.6V 1.5Ah    |
| Ballast Lumen Factor (BLF)   | N/A           |
| DIMMING                      |               |
| DALI                         | N/A           |
| OTHER                        | N/A           |
| Switch Dim                   | N/A           |
| Corridor Function            | N/A           |
| SENSORS                      |               |
| Microwave                    | N/A           |
| PIR                          | Yes           |
| STANDARDS/APPROVALS          |               |
| CE Marked                    | Yes           |
| Certificate of Conformity    | Yes           |
| Accreditations               | N/A           |
| BARCODE                      |               |
| EAN Number                   | 5055825954408 |

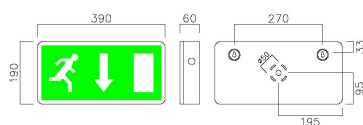

\* GUIDE ONLY