




Cable Lug Terminals



- Materials:
Terminal body: Copper
Plating: Bright electro tin
- Excellent corrosion resistance and conductivity
- Bell mouth for easy cable entry
- Used for terminating onto studs or bolts for heavy duty applications
- Terminal has an inspection hole to ensure cable is fully inserted

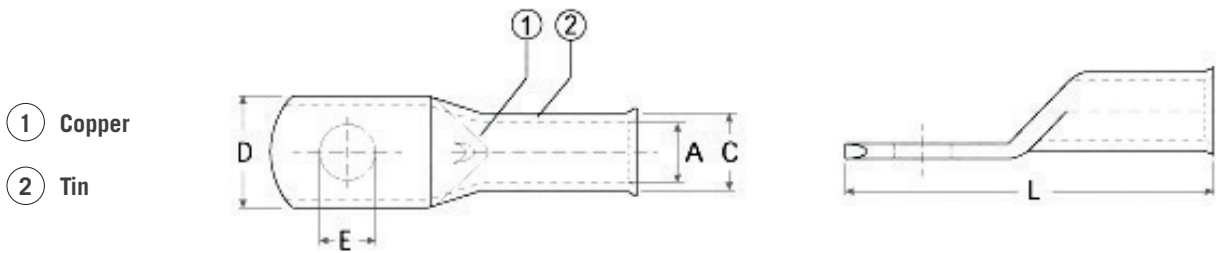

Part No.	Wire Range (mm ²)	Stud Hole E (mm)	Dimensions (mm)			
			A	C	D	L
YT4 - 6	4	6.5	3.1	4.8	10	20
YT6 - 4	6	4.2	3.8	5.5	10	23
YT6 - 5	6	5.2	3.8	5.5	10	23
YT6 - 6	6	6.5	3.8	5.5	10	24
YT6 - 8	6	8.2	3.8	5.5	12	24
YT6 - 10	6	10.5	3.8	5.5	15	27
YT10 - 5	10	5.2	4.5	7.1	11	25
YT10 - 6	10	6.5	4.5	6.2	11	25
YT10 - 8	10	8.2	4.5	6.2	12	27
YT10 - 10	10	10.5	4.5	7.1	15	35
YT10 - 12	10	12.7	4.5	7.5	15	35
YT16 - 5	16	5.2	5.4	7.0	12	30
YT16 - 6	16	6.5	5.4	7.0	12	32
YT16 - 8	16	8.2	5.4	7.0	12	32
YT16 - 10	16	10.5	5.4	7.0	15	40
YT16 - 12	16	12.7	5.4	7.0	17	40



YOUR ESSENTIALS

Part No.	Wire Range (mm ²)	Stud Hole E (mm)	Dimensions (mm)			
			A	C	D	L
YT25 - 6	25	6.5	6.8	8.8	13	30
YT25 - 8	25	8.2	6.8	8.8	13	30
YT25 - 10	25	10.5	6.8	8.8	15	30
YT25 - 12	25	12.7	6.8	8.8	16	30
YT35 - 6	35	6.5	8.2	10.2	16	35
YT35 - 8	35	8.2	8.2	10.2	16	35
YT35 - 10	35	10.5	8.2	10.2	16	35
YT35 - 12	35	12.7	8.2	10.2	18	42
YT50 - 6	50	6.5	9.5	12.0	18	49
YT50 - 8	50	8.2	9.5	12.0	18	43
YT50 - 10	50	10.5	9.5	12.0	18	43
YT50 - 12	50	12.7	9.5	12.0	20	43
YT50 - 14	50	14.7	9.5	12.0	21	43
YT50 - 16	50	17.0	9.5	12.0	21	43
YT70 - 6	70	6.5	11.2	14.5	21	50
YT70 - 8	70	8.2	11.2	14.5	21	50
YT70 - 10	70	10.5	11.2	14.5	21	50
YT70 - 12	70	12.7	11.2	14.5	21	50
YT70 - 14	70	14.7	11.2	14.5	22	50
YT70 - 16	70	17.0	11.2	14.5	26	57
YT95 - 8	95	8.2	13.5	17.0	25	60
YT95 - 10	95	10.5	13.5	17.0	25	55
YT95 - 12	95	12.7	13.5	17.0	25	55
YT95 - 14	95	14.7	13.5	17.0	25	55
YT95 - 16	95	17.0	13.5	17.0	25	55
YT120 - 8	120	8.2	15.0	19.0	28	60
YT120 - 10	120	10.5	15.0	19.0	28	60
YT120 - 12	120	12.7	15.0	19.0	28	60
YT120 - 14	120	14.7	15.0	19.0	28	60
YT120 - 16	120	17.0	15.0	19.0	28	60
YT150 - 8	150	8.4	16.5	21.0	30	69
YT150 - 10	150	10.5	16.5	21.0	30	69
YT150 - 12	150	12.7	16.5	21.0	30	69
YT150 - 14	150	14.7	16.5	21.0	30	69
YT150 - 16	150	17.0	16.5	21.0	30	69
YT150 - 20	150	21.0	16.5	21.0	30	69
YT185 - 10	185	10.5	18.5	23.0	34	78
YT185 - 12	185	12.7	18.5	23.0	34	78
YT185 - 14	185	14.7	18.5	23.0	34	78



Part No.	Wire Range (mm ²)	Stud Hole E (mm)	Dimensions (mm)			
			A	C	D	L
YT185 - 16	185	17.0	18.5	23.0	34	78
YT185 - 20	185	21.0	18.5	23.0	34	78
YT240 - 10	240	10.5	21.5	26.0	38	92
YT240 - 12	240	12.7	21.5	26.0	38	92
YT240 - 14	240	14.7	21.5	26.0	38	92
YT240 - 16	240	17.0	21.5	26.0	38	92
YT240 - 20	240	21.0	21.5	26.0	38	92
YT300 - 10	300	10.5	23.5	29.0	43	101
YT300 - 12	300	12.7	23.5	29.0	43	101
YT300 - 14	300	14.7	24.0	29.0	43	101
YT300 - 16	300	17.0	24.0	29.0	43	101
YT300 - 20	300	21.0	23.5	29.0	43	101
YT400 - 12	400	13.0	28.5	36.0	53	114
YT400 - 14	400	14.7	28.5	36.0	53	114
YT400 - 16	400	17.0	28.5	36.0	53	114
YT400 - 20	400	21.0	29.0	36.0	53	114
YT500 - 12	500	13.0	30.0	36.0	56	124
YT500 - 14	500	14.7	30.0	36.0	56	124
YT500 - 16	500	17.0	30.0	36.0	56	124
YT500 - 20	500	21.0	30.0	36.0	56	124
YT630 - 12	630	13.0	35.0	45.0	64	144
YT630 - 14	630	14.7	35.0	45.0	64	144
YT630 - 16	630	17.0	35.0	45.0	64	144
YT630 - 20	630	21.0	35.0	45.0	64	144