

INSTALLATION & MAINTENANCE MANUAL
IN0025. IN0026. IN0027.

Knightsbridge®
the mark of quality



IP65 ROTARY ISOLATOR



GENERAL INSTRUCTIONS


These instructions should be read carefully and retained after installation for further reference and maintenance.

SAFETY

- Installation of this product should only be carried out by a qualified electrician or competent person to the latest Building and current IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this product when deciding the location for installation
- This product is Class I and requires an earth
- This product is IP65 rated


INSTALLATION

- Ensure the switch is in the OFF position
- Unscrew the cover screws and remove the cover
- Choose a suitable flat fixing surface that will support the weight of the switch. On the back of each switch is detailed the fixing centers for the fixing holes. Mark, drill and plug the wall for the fixings and fix the switch to the wall
- Using the cable entry knockouts provided, remove the appropriate knockouts and install the mains cables into the switch ensuring that the correct IP rated gland is used to maintain the IP rating of the switch
- For ease of wiring the switch can be removed from the base and clicked back in once wiring is complete (see diagram on the next page)
- Wire the switch in accordance with the machine/appliance manufacturer's recommendations
- After the wiring to the switch has been completed, ensure that the control/switch knob is still in the off position, and replace the cover and outer-casing screws. Do not overtighten the cover screws
- Test for correct operation

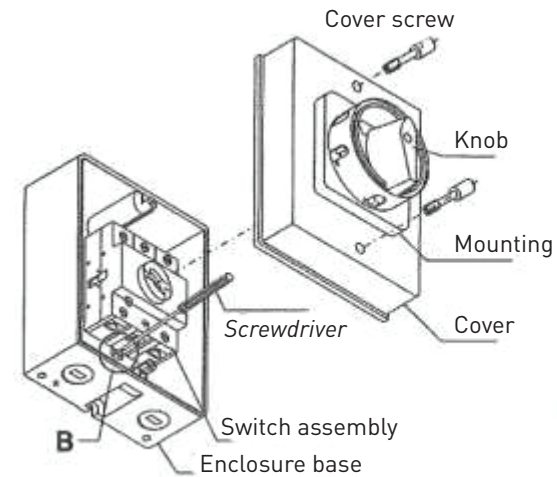

* Detail B

Use screwdriver to pull rail - slide to remove switch from enclosure base



LOCK OFF FACILITY

The switch has the provision to have 3 separate padlocks inserted in the OFF position only.

GENERAL

The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist. Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.