

## Curved Edge Range - Grid

These instructions should be read carefully and retained after installation for further reference and maintenance.


### SAFETY

- Before installation/maintenance, ensure that the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations and current Building Regulations. **If in any doubt, consult a qualified electrician**
- Do not overload this accessory or subject it to conditions outside its rating
- Please recycle

### INSTALLATION

- All earth connections must be made and maintained. Use green/yellow sleeving on earth conductors that are not insulated
- Check all connections are secure
- Fit the unit into a suitable wall box taking care not to compress, damage or trap any cables, and secure with the screws provided

### WIRING

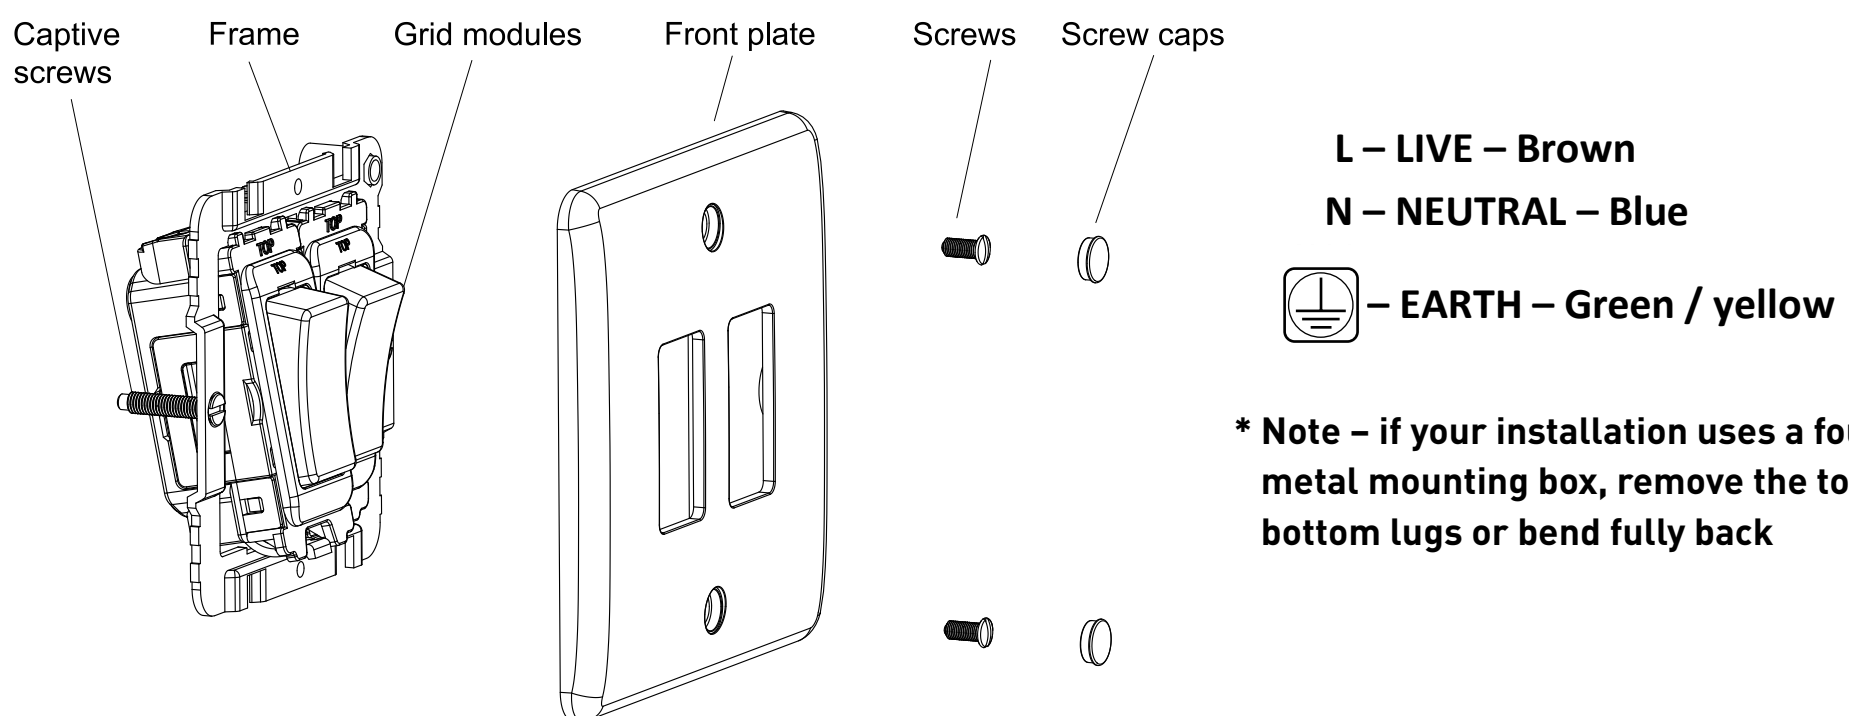

- Connect the earth cable to the grid frame and mount to the box using the screws provided. The position of the frame in relation to the wall can be adjusted by the two captive fixing screws. For installations with more than one grid frame, it is important that all the grid frames are effectively connected to earth via their own respective earth terminals
- Pull cabling through the frame and strip insulation accordingly. Proceed to terminate cables into each module
- Locate the groove in the higher edge of the module and clip into the aperture at the base of the module as per the above image
- Adjust the position of the frame in relation to the wall. Attach the front plate using the fixing screws provided and push in screw cap covers
- Switch on power and test for correct operation

### PLATE FIXING

- Always ensure the wall surface is flat and smooth for optimum installation
- To maintain the finish of this product, periodically wipe over with a soft dry cloth only, do not use abrasive cleaning products

### WARRANTY

This product has a warranty of 15 years\* from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring regulations (BS7671), improper use or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.\*3 years on dimmers and electronic components