

Description

Wire mesh tray with rapid click system, from 60 mm height, width 150 mm, made of steel, finished in electrogalvanised with safety edge for support and cable management. The Rejiband Rapide cable tray is composed of electro-welded mesh rods that provide great strength and elasticity. The ease of assembly, thanks to its flexibility and its Click system for quick connection, allows the union between sections of trays without the need for screws, which means a saving in material and labour cost. Manufactured according to international standard IEC 61537. It is distributed in different sizes.

Advantages

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rounded safety edge that prevents damage to the cables and harm to the installer.

Rapid connection system with pre-fitted couplers reduces installation time by 40%.

Electrical continuity guaranteed according to standard IEC61537.

Electrogalvanised finish (standard EN-ISO 2081), silver colour, suitable for indoor installations. Corrosion resistance class 3.

Applications

Rapid installation of wire mesh trays for the Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Major Infrastructures, Airports, Underground and Railway, Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food.

Solutions



CENTROS DE DATOS EDIFICACIÓN. TERCIARIO RESISTENCIA AL FUEGO



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

Finish	E.G.	Material	Steel with surface coating
Fire Resistance	E90 (90 min. 1000°C)	Resistance Class	Class 3
Flange	60	Section (mm²)	6976
Impact Strength (J)	20	Width (mm)	150
kg/m	0.957	Working temperature range (°C)	-50° / 150°
m	24 m		

Coatings

PG/GS - Pre-Galvanised Finish. Resistance to corrosion according to EN-10346. Adequate for indoor installations.

EZ - Electrogalvanized, white, according to EN ISO 2081. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Improved resistance to corrosion, especially adequate for demanding indoor installations.



GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Appropriate for outdoor installations and aggressive environments.

BLACK C8 - High Resistance coating, Black Colour. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.


304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicron treatment. Appropriate for outdoor installations and highly aggressive environments.





Load diagrams


		mm ²
60	60	2.520
	100	4.420
	150	6.783
	200	9.333
	300	14.050
	400	19.050
	450	21.500
	500	24.050
	600	29.050

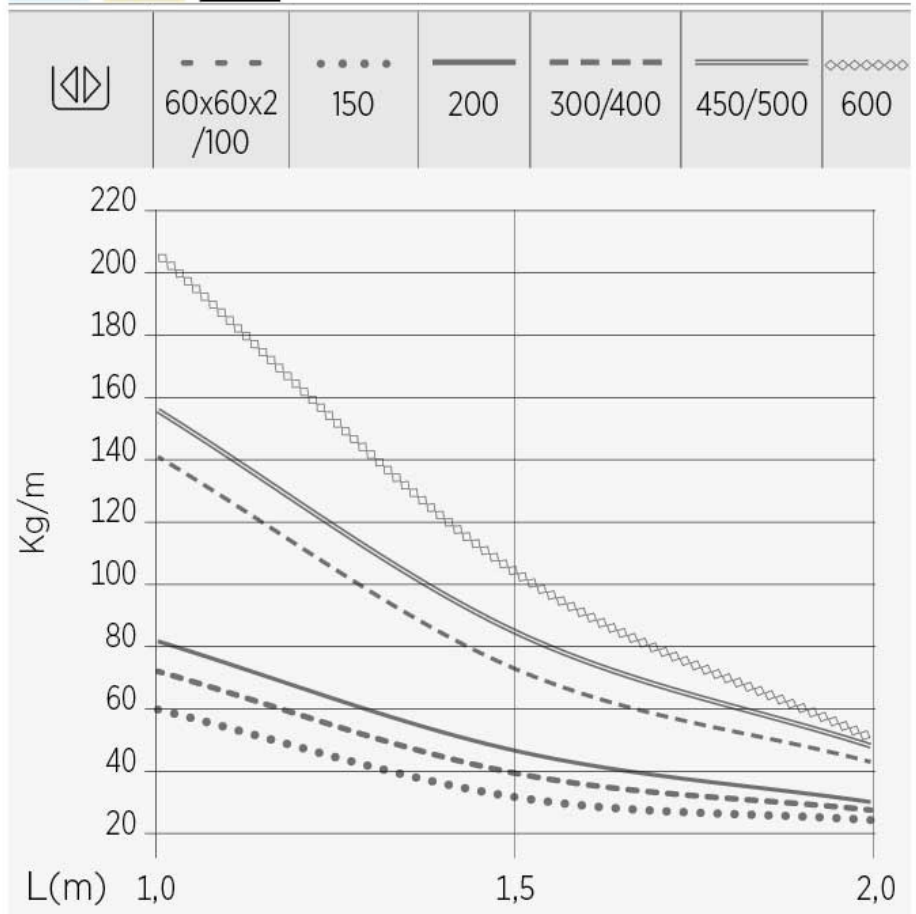EZ BC C8



EZ BC C8

		mm ²
100	100	7.462
	150	11.562
	200	16.290
	300	25.290
	400	34.290
	450	39.396
	500	43.290
	600	52.290

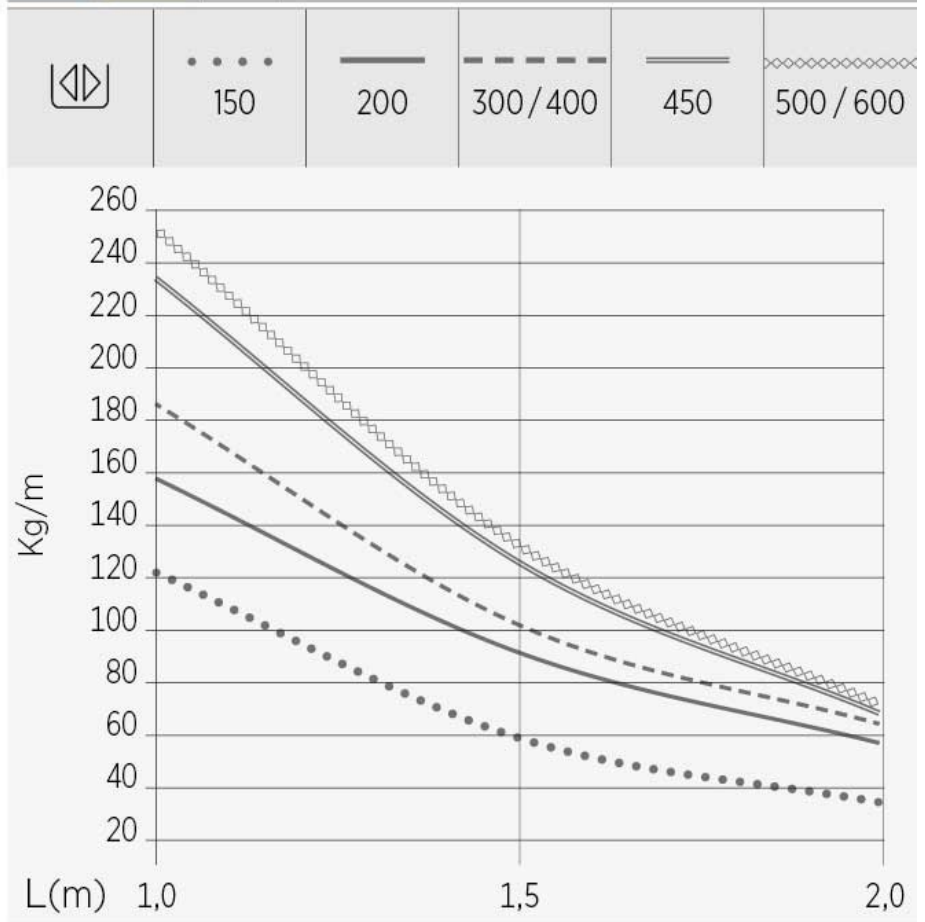

Product applications

□□□□



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

