
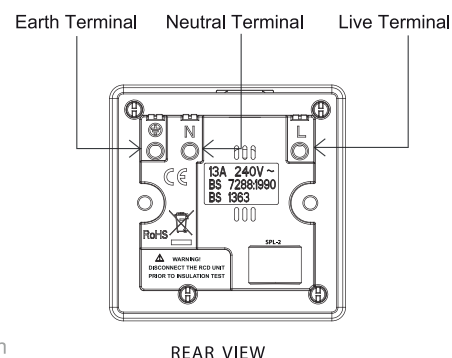
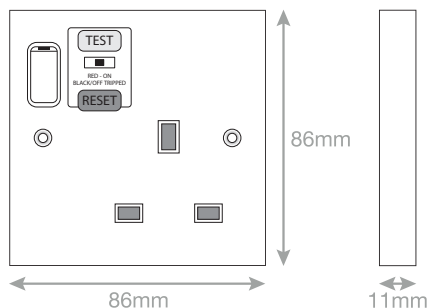


# Data Sheet : SPL-2

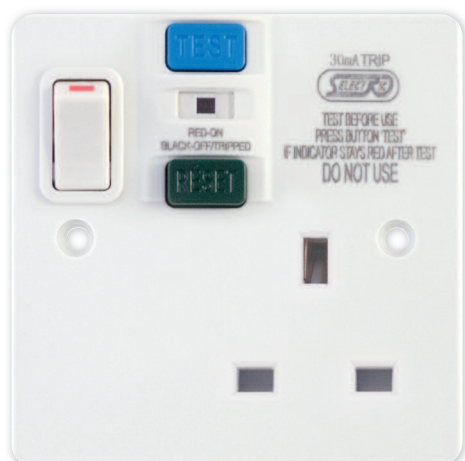

Code	SPL-2
Description	1 Gang 13 Amp Passive/Latching RCD Socket DP - Switched
Size	86mm x 86mm x 11mm depth
Range	Selectric Square
Colour	White
Material	Bakelite
Voltage Rating	240V AC
Rated Tripping Current	30mA
Breaking Capacity	250A
Short Circuit Withstand	1500A
Ambient Operating Temp	-5°C to 40°C
Operating Speed	<40mS
Contact Break	Double Pole
Cable Capacity	5 X 2.5mm <sup>2</sup> 2 x 4mm <sup>2</sup> 1 X 6mm <sup>2</sup>
RCD Type	Latching pin
Included	M3.5 fixing screws
Weight	0.3kg
Inner Carton Quantity	10
Inner Carton Weight	3kg
Guarantee	5 years
Barcode	5025117700136
Commodity Code	85369085
Standards	BS 1363-2 & BS 61543

## Notes

- RCD (residual current device):  
RCDs are life-saving devices which are designed to prevent you from getting a fatal electric shock if you touch something live, such as a bare wire
- LATCHING or PASSIVE:  
When the power is lost due to an earth fault, the RCD trips out and isolates the circuit it is protecting. Latching RCD's do not trip during power cuts so they are great for fridges, freezers, fish tanks, battery charging and also for protecting remote/unmanned areas
- Surface mounting box included
- Minimum Box Depth: 25mm