



**UK
CA** **CE**

4 Pole Metal Enclosed Fused Switch with Door Interlocked Handle

Technical Data

- 4 Pole (3P+ N) Fused Switch
- 32, 63, 80, 100 & 125 Amp
- AC21A 690VAC
- Weather proof to IP65
- Door Interlocked Handle
- Padlockable in Off position
- IP20 Protected terminals
- Rotary Isolator
- Fuse Holder & Fuses
- High quality steel enclosure
- Top & Bottom Gland Plates
- Manufactured to IEC/EN 60947-3


For any further comments or assistance please contact:

eris-eu.com



Part Number	ERSMFS323PN	ERSMFS633PN	ERSMFS803PN	ERSMFS1003PN	ERSMFS1253PN
Poles	4 (3P+N)	4 (3P+N)	4 (3P+N)	4 (3P+N)	4 (3P+N)
Amperage	32 Amp	63 Amp	80 Amp	100 Amp	125 Amp
Rating	AC21A 690V (Resistive Loads)				
Fuse Size	10x28	22x58	22x58	22x58	22x58
Fuse Amperage	32 Amp	63 Amp	80 Amp	100 Amp	125 Amp
IP Rating (Enclosure)	IP65				
IP Rating (Terminals)	IP20				
Enclosure	High quality steel, powder coated to RAL7035, with Top & Bottom Gland Plates				
Enclosure Dimensions (mm)	300 x 200 x 150	400 x 300 x 150	400 x 300 x 150	400 x 300 x 150	400 x 400 x 200
Max. Tightening Torque (Main Switch)	1.2Nm	1.2Nm	2Nm	2Nm	4.5Nm
Max. Tightening Torque (Fuse Holder)	1.5Nm	3.5Nm	3.5Nm	3.5Nm	3.5Nm

Wiring Diagram

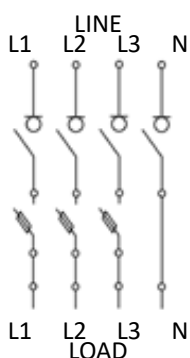

For any further comments or assistance please contact:

eris-eu.com