




# Terminals

## Fork Terminals

- Materials:  
Conductor: Copper, Insulation: Vinyl, Plating: Tin
- Operating Temperature:  
-10°C to +75°C
- Max. voltage rating: 600V
- Flared barrel for easy wire insertion
- Low insertion force and easy crimping whilst ensuring secure termination



Max. Current Rating	
Red	19A
Blue	27A
Yellow	48A

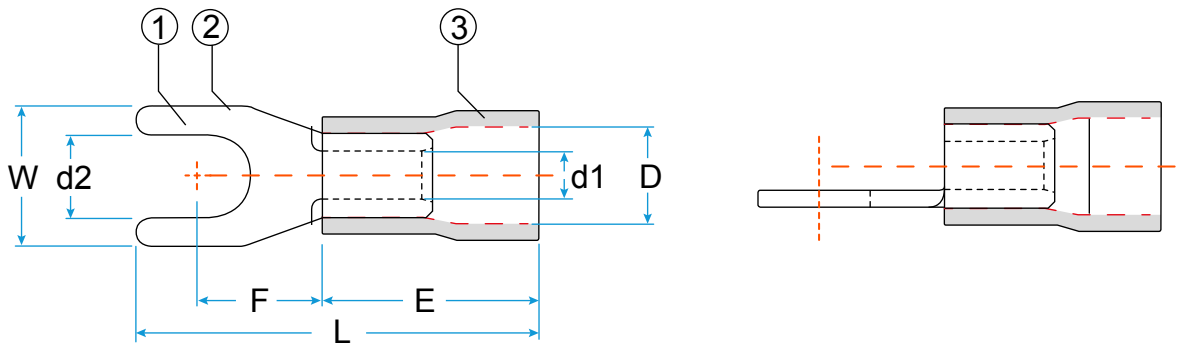

Material ① Brass ② Tin ③ Vinyl ④ Copper

Part No.	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)						
			D	d1	d2	W	L	E	F
YCRF32RE	Red	0.5-1.5	4.3	1.7	3.3	5.7	21.0	10.0	6.5
YCRF37RE	Red	0.5-1.5	4.3	1.7	3.8	5.7	21.0	10.0	6.5
YCRF43RE	Red	0.5-1.5	4.3	1.7	4.4	6.4	21.0	10.0	6.5
YCRF53RE	Red	0.5-1.5	4.3	1.7	5.4	8.1	21.0	10.0	6.5
YCRF64RE	Red	1.5-2.5	4.3	1.7	6.6	9.5	21.0	10.0	6.5
YCRF32BL	Blue	1.5-2.5	4.8	2.3	3.3	5.7	21.0	10.0	6.5
YCRF37BL	Blue	1.5-2.5	4.8	2.3	3.8	5.7	21.0	10.0	6.5
YCRF43BL	Blue	1.5-2.5	4.8	2.3	4.4	6.4	21.0	10.0	6.5
YCRF53BL	Blue	1.5-2.5	4.8	2.3	5.4	8.1	21.0	10.0	6.5
YCRF64BL	Blue	1.5-2.5	4.8	2.3	6.6	9.3	21.0	10.0	6.5
YCRF37YE	Yellow	4.0-6.0	6.7	3.4	3.8	8.3	25.5	13.0	7.0
YCRF43YE	Yellow	4.0-6.0	6.7	3.4	4.4	8.3	25.5	13.0	7.0
YCRF53YE	Yellow	4.0-6.0	6.7	3.4	5.4	9.0	25.5	13.0	7.0
YCRF64YE	Yellow	4.0-6.0	6.7	3.4	6.6	9.0	25.5	13.0	7.0