

INSTALLATION & MAINTENANCE MANUAL

WALL1 / WALL2 / WALL3

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

WALL1 / WALL2 / WALL3


SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is Class I and must be earthed
- This product series is IP65 rated

INSTALLATION

- Provide power to the required point of installation (refer to BS7671 for correct cabling methods). Suitable IP rated junction boxes should be used where required
- Using the Allen key provided, carefully loosen the three grub screws securing the baseplate to the luminaire (see Fig. 1)

Fig. 1

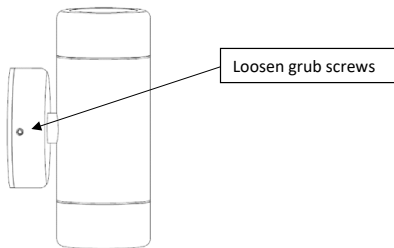

- Using the baseplate as a template, mark the location for, and drill the fixing holes ensuring not to infringe with any gas / water pipes or electrical cables
- Feed the mains cable through the rubber grommet to retain IP rating, and secure the baseplate using the screws provided
- Connect the luminaire to the mains supply ensuring that correct polarity is observed (see Fig. 2):
L - Live (brown), E - Earth (green/yellow), N - Neutral (blue)

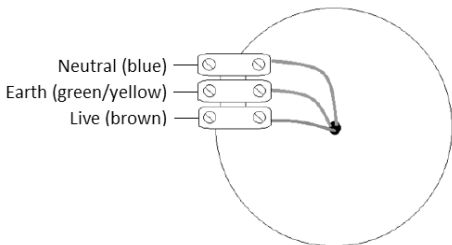


Fig. 2

- Replace the luminaire onto the baseplate and fasten the three grub screws
- Unscrew the bezel, insert a suitable GU10 lamp and carefully replace the bezel ensuring that the seal is in place and not damaged
- Switch on and check for correct operation

WARNING

This product is not suitable for installation in or near a coastal or marine environment.

GENERAL

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

Do not use any source of high-pressure washers to maintain or clean this luminaire.

If installed outdoors, a light film of acid-free oil is recommended after installation and maintained periodically (2-3 times a year) to aid corrosion prevention.

This product is dimmable dependent on lamp type.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

**INTERNATIONAL
CONTACT DETAILS**



**230V
50Hz**

IP65



ML
ACCESSORIES LTD



**UK
CA**



02

ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk