



Quick Disconnects

Fully Insulated Female Disconnects


- Materials:
 Conductor: Brass
 Sleeve: Copper tubular
 Insulation: Vinyl
 Plating: Tin
- Operating Temperature:
 -10°C to +75°C
- Voltage rating: 300V
- Flared barrel for easy wire insertion
- Low insertion force and easy crimping whilst ensuring secure termination




Max. Current Rating	
Red	10A
Blue	15A
Yellow	24A



Standard Internal Copper Sleeve

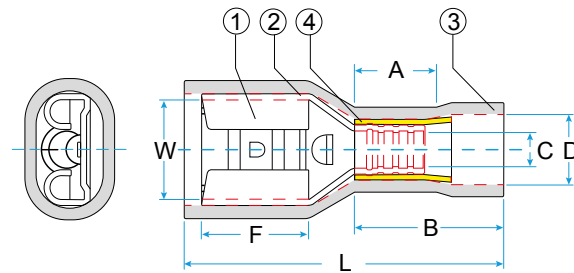

Long Internal Copper Sleeve

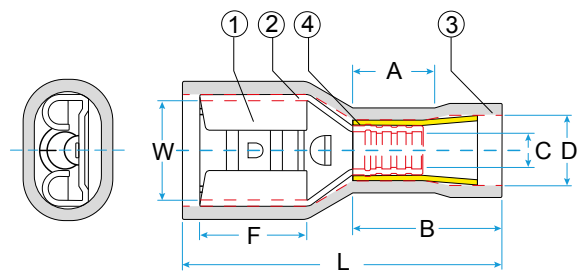

Material ① Brass ② Tin ③ Vinyl ④ Copper

Part No.	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)						
				A	B	C	D	W	L	F
YCRFI28RE	Red	0.5-1.5	0.8 x 2.80	5.2	10.5	1.7	3.8	3.2	19.0	6.4
YCRFI48RE	Red	0.5-1.5	0.8 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
YCRFI63RE	Red	0.5-1.5	0.8 x 6.35	5.2	10.5	1.7	3.8	6.6	22.8	7.2
YCRFI48BL	Blue	1.5-2.5	0.8 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
YCRFI63BL	Blue	1.5-2.5	0.8 x 6.35	5.2	10.5	2.3	4.7	6.6	22.8	7.2
YCRFI63YE	Yellow	4.0-6.0	0.8 x 6.35	5.7	10.9	3.4	6.2	6.6	23.8	7.2
YCRFI95YE	Yellow	4.0-6.0	1.2 x 9.40	5.7	10.9	3.4	6.2	10.0	30.0	12.0