



Knightsbridge[®]
the mark of quality

INSTALLATION & MAINTENANCE MANUAL WALLxL Series



230V
50Hz

IP
65



ML
ACCESSORIES LTD



RoHS
COMPLIANT



02





GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

WALL1L, WALL2L, WALL3L, WALL1LC, WALL2LC, WALL3LC

SAFETY

- Installation of this luminaire should only be carried out by a qualified electrician or competent person to the latest Building and current IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation
- This product is class I and requires an earth
- This product series is IP65 rated

GENERAL SPECIFICATIONS

- Provide power to the required point of installation. Suitable IP rated junction boxes should be used where required
- Using a 7mm spanner, remove the two nuts securing the baseplate of the luminaire (see Fig 1)

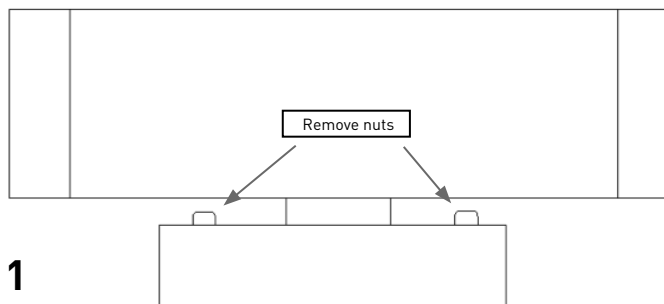


Fig 1

(WALL2L shown)

- Using the baseplate as a template, mark the location of the fixing holes and drill the holes ensuring not to infringe with any joists, gas or water pipes or electrical cables
- Feed the mains cable through the rubber grommet to retain IP rating, and secure baseplate to the desired surface
- Ensuring correct polarity is observed, carefully wire as shown in Fig 2

2



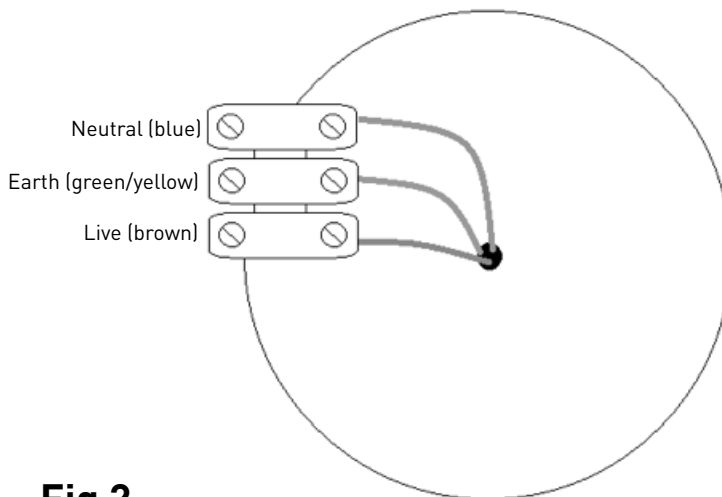


Fig 2

- Secure the fitting to the mounted baseplate and fasten the two nuts
- Switch on and check for correct operation

WARNING

This product is unsuitable for installation in or near coastal and marine environments. Do not use any source of high pressure washers to maintain or clean, this luminaire.

GENERAL

The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

A light film of acid free oil is recommended after installation and maintained periodically (2-3 times a year) to aid corrosion prevention. We recommend using a lamp of a maximum 35W.

WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.





Knightsbridge[®]

the mark of quality



ML Accessories Limited
LU5 5TA
www.mlaccessories.co.uk

SBJAN17_V3

