

# Quick Disconnects

## Male Quick Disconnects


- Materials:  
Conductor: Brass, Sleeve: Copper tubular  
Insulation: Vinyl, Plating: Tin
- Operating Temperature:  
-10°C to +75°C
- Max. voltage rating: 300V
- Flared barrel for easy wire insertion
- Low insertion force and easy crimping whilst ensuring secure termination




Max. Current Rating	
Red	10A
Blue	15A
Yellow	24A



### Standard Internal Copper Sleeve

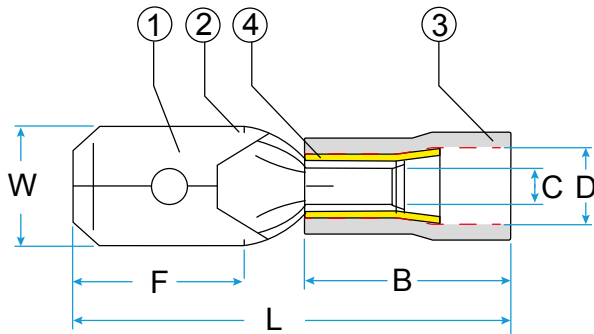

### Long Internal Copper Sleeve

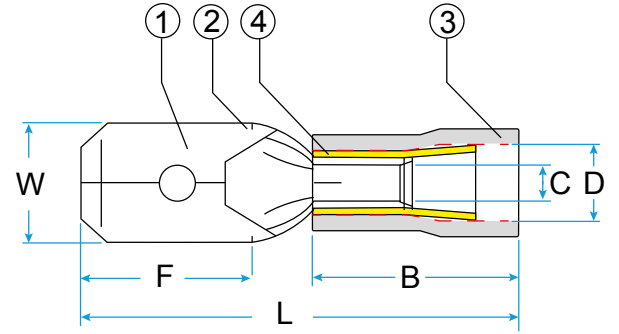

Material ① Brass ② Tin ③ Vinyl ④ Copper

Part No.	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)						
			Tab Size	B	C	D	W	L	F
YCRM63RE	Red	0.5-1.5	0.8 x 6.35	10.5	1.7	3.9	6.35	20.8	6.7
YCRM63BL	Blue	1.5-2.5	0.8 x 6.35	10.5	2.3	4.7	6.40	20.8	7.7
YCRM63YE	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.3	6.35	24.0	7.7