

Quick Disconnects

Piggy Back Disconnects


- Materials:
 - Conductor: Brass
 - Sleeve: Copper tubular
 - Insulation: Vinyl
 - Plating: Tin
- Operating Temperature: -10°C to +75°C
- Max. voltage rating: 300V
- Flared barrel for easy wire insertion
- Low insertion force and easy crimping whilst ensuring secure termination




Max. Current Rating	
Red	10A
Blue	15A
Yellow	24A



Standard Internal Copper Sleeve

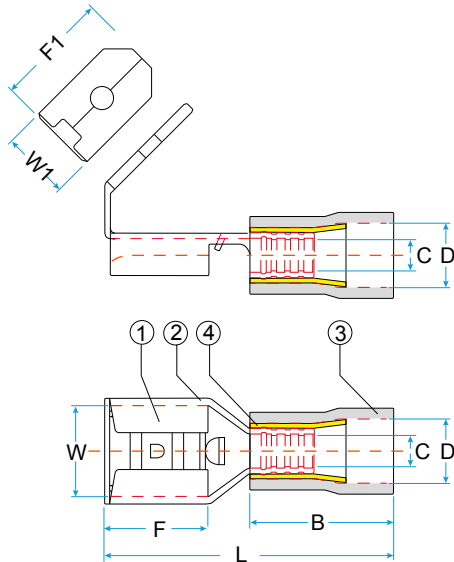

Long Internal Copper Sleeve

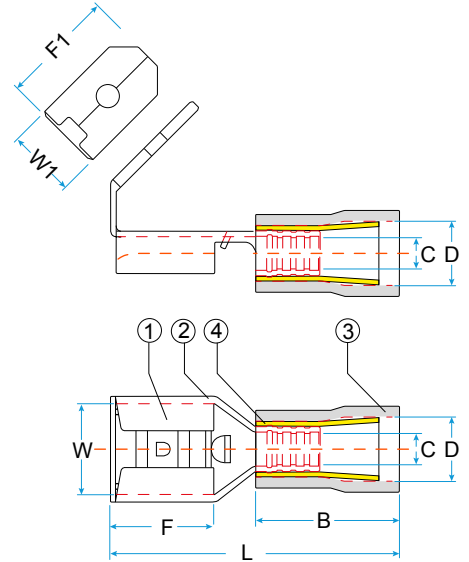

Material ① Brass ② Tin ③ Vinyl ④ Copper

Part No.	Colour	Wire Range (mm ²)	Tab Size	Dimensions (mm)							
				B	C	D	W	W1	L	F	F1
YCRPB63RE	Red	0.5-1.5	0.8 x 6.35	10.0	1.7	3.8	6.7	6.35	21.0	8.0	8.2
YCRPB63BL	Blue	1.5-2.5	0.8 x 6.35	10.0	2.3	4.7	6.7	6.4	21.0	8.0	8.2
YCRPB63YE	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.2	6.7	6.4	24.5	8.0	8.2