

SNUG MAT 200W/m²


Part Code: 200MAT
Snug Mat 200W/m²

OVERVIEW

The Snug Mat is a triple-insulated Class 2 heating mat, which is designed to be the single or primary heat source in a room.

The twin conductor, single-connection heating cable is woven on to an adhesive backed fabric mesh that not only holds the heating cable together, but means the mat stays flat as soon as it's rolled out, making it one of the easiest floor heating systems to install on the market. Plus, it is also one of the thinnest at just 2mm thick.

Manufactured in a wide range of ready-made sizes and with the supply lead wire at one end only. This design offers maximum flexibility to the installer; is easy to plan and lay; and is suitable for large or small areas.

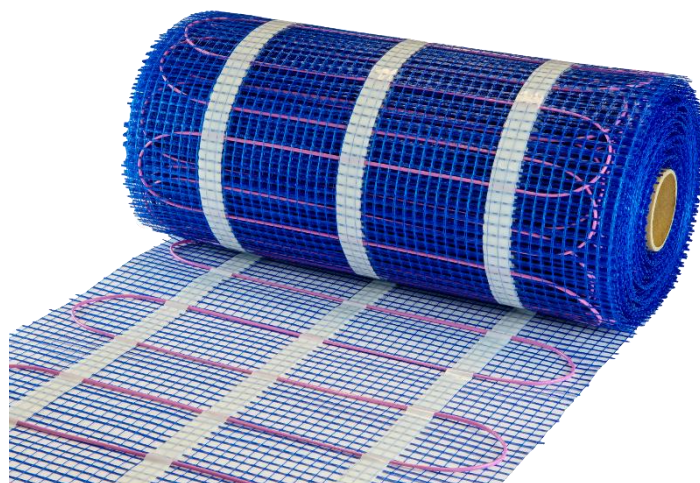

KEY FEATURES

- Extra powerful underfloor heating
- Designed to be the single or primary heat source
- Ideal in lounges, kitchens or conservatories
- Suitable under ceramic tile, slate, terracotta, stone, limestone or marble
- One of the thinnest on the market at just 2mm
- Fully adhesive backed underfloor heating mat
- Available from 1m² to 15m²
- 3m cold lead
- FEP (Fluoropolymer) cable jacket
- Exceeds international standards
- One simple connection cable
- No electromagnetic fields
- Lifetime cable warranty

SNUG MAT 200W/m²


SPECIFICATIONS

Output	200W/m ²
Thickness	2mm wire
Voltage	230V
Width	500mm
Warranty	Lifetime cable warranty
Protection Class	1 RCD
Max. Temperature Output	+80°C
Connection	One side connection
Net Colour	Blue
Distance Between Cable	80mm

PRODUCT RANGE

PART No.	AREA	LOADING	RESISTANCE
200MAT1	1m ²	200w	265Ω
200MAT1.5	1.5m ²	300w	176Ω
200MAT2	2m ²	400w	132Ω
200MAT2.5	2.5m ²	500w	105Ω
200MAT3	3m ²	600w	88Ω
200MAT4	4m ²	800w	66Ω
200MAT5	5m ²	1000w	53Ω
200MAT6	6m ²	1200w	44Ω
200MAT7	7m ²	1400w	38Ω
200MAT8	8m ²	1600w	33Ω
200MAT9	9m ²	1800w	29Ω
200MAT10	10m ²	2000w	26Ω
200MAT12	12m ²	2400w	22Ω
200MAT15	15m ²	3000w	17Ω

WIRING SCHEMATIC DIAGRAM

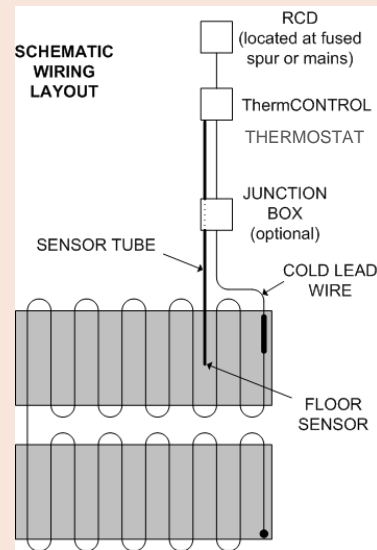

INSTALLATION ADVICE

