


# LED Panel 1200

- Energy savings up to 60% when replacing T8 fluorescent luminaires
- Suitable for 25mm and 15mm T-bar ceilings
- Frame colour: White
- Opal diffuser: TP(b) rated
- Standard non dimmable driver included
- Colour temperature: 4000K and 6000K options
- Colour rendering index: >80
- Rated Life (L70): 50,000 hours
- Options available:
  - Dimmable driver Touch (Push) and DALI: **LXLPF2-1400-DTD**
  - Emergency 3hr remote pack: **LXLPF2-60-EM3**
  - Surface mounting frame: **LXPAN126SMB**
  - Wire suspension kit: **LXPAN1263SCK**
  - Recessed fixing clips x4 pack: **LXPAN66RFC** (x2 packs required)

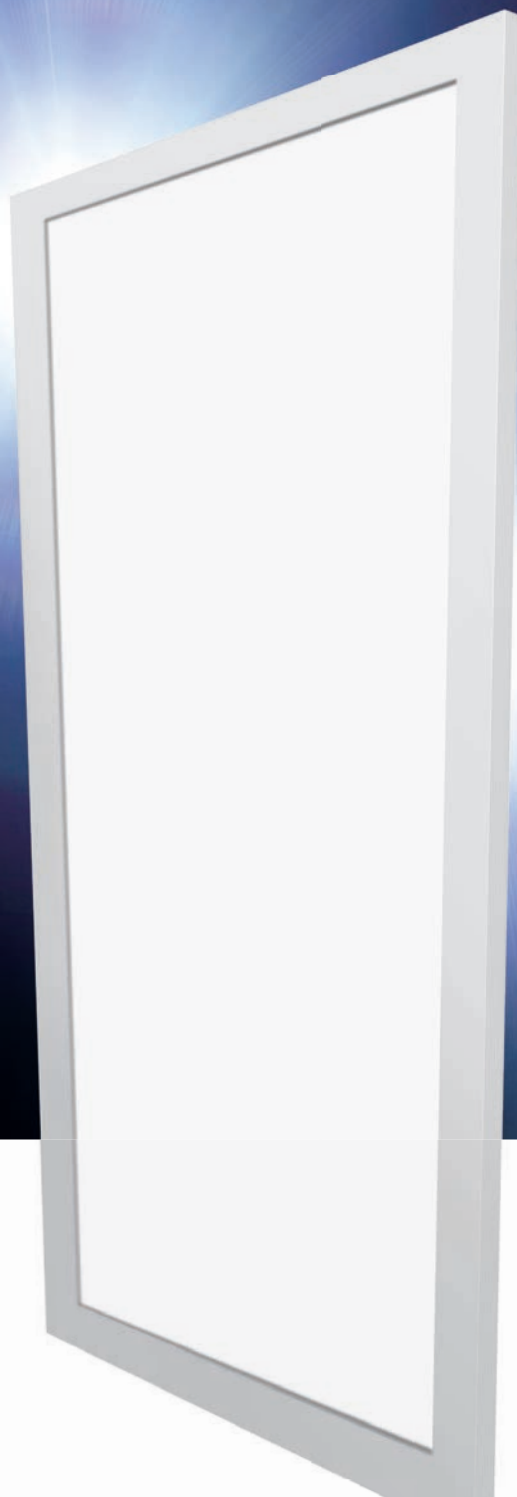

**5 YEAR**  
WARRANTY

**LED**

**IP20**

SAVE  
UP TO **60%**  
ON ENERGY

**L1A** BUILDING  
REGULATIONS  
COMPLIANT

**L2B** BUILDING  
REGULATIONS  
COMPLIANT

| Part No.                | Wattage | Measurement<br>L x W x H | Lumen Output | IP Rating | Colour<br>Temperature |
|-------------------------|---------|--------------------------|--------------|-----------|-----------------------|
| <b>LXPAN60LED126NW2</b> | 60W     | 1195 x 595 x 10.5mm      | 5100Lm       | IP20      | 4000K                 |
| <b>LXPAN60LED126CW2</b> | 60W     | 1195 x 595 x 10.5mm      | 5100Lm       | IP20      | 6000K                 |



**Email** [sales@luxna.co.uk](mailto:sales@luxna.co.uk)



**Web** [luxna-lighting.com](http://luxna-lighting.com)