


# LED Panel 1200

- Energy savings up to 60% when replacing T8 fluorescent luminaires
- Suitable for 25mm and 15mm T-bar ceilings
- Frame colour: White
- Standard non dimmable driver included
- Colour temperature: 4000K and 6000K options
- Colour rendering index: >80
- Rated Life (L70): 50,000 hours
- Options available:
  - Dimmable driver 1-10v & DALI: **LXLPF2-30D-48**
  - Dimmable driver Touch (Push) and DALI: **LXLPF2-1400-DTD**
  - Emergency 3hr remote pack: **LXLPF2-60-EM3**
  - Surface mounting frame: **LXPAN123SMB, LXPAN126SMB**
  - Wire suspension kit: **LXPAN1263SCK**
  - Recessed fixing clips x4 pack: **LXPAN66RFC** (x2 packs required)

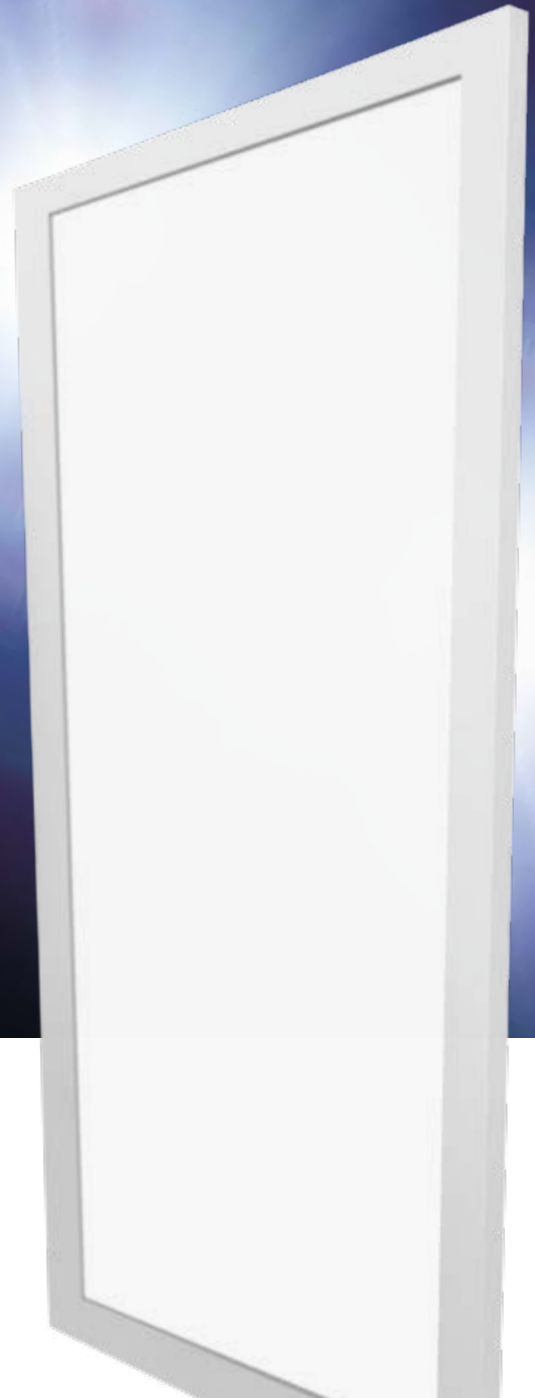

**5 YEAR**  
WARRANTY

**LED**

**IP20**

SAVE UP TO **60%**  
ON ENERGY

**L1A** BUILDING REGULATIONS COMPLIANT

**L2B** BUILDING REGULATIONS COMPLIANT

Part No.	Wattage	Measurement L x W x H	Lumen Output	IP Rating	Colour Temperature
LXPAN60LED123NW2	60W	1195 x 295 x 10.5mm	1500Lm	IP20	4000K
LXPAN60LED123CW2	60W	1195 x 295 x 10.5mm	1500Lm	IP20	6000K
LXPAN60LED1263NW2	60W	1195 x 595 x 10.5mm	1500Lm	IP20	4000K
LXPAN60LED1263CW2	60W	1195 x 595 x 10.5mm	1500Lm	IP20	6000K



Email [sales@luxna.co.uk](mailto:sales@luxna.co.uk)



Web [luxna-lighting.com](http://luxna-lighting.com)