

# Filament LED Candle

07365 KFLM04CND/B22-CLR-N27-K

## 4w LED Filament Candle B22 C35 Clear 2700K

- Linear LED filament provides a traditional appearance
- Even light distribution



### Overview

The Kosnic LED Filament lamp has a traditional appearance and gives an even spread of light in all directions. It is also highly functional and efficient, giving a quality of light that creates inviting living spaces while offering huge energy savings over filament lamps without compromising on brightness.



### General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	15,000 h

### Compliance

LVD	EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022, EN 62560:2012+A11:2019
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023

### Technical Summary

Product Code	KFLM04CND/B22-CLR-N27-K
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	3.6A/1440us
Default Power	4.2 W
Power Factor	0.4
Default CCT	2,700 K
SDCM of CCT	<6
CRI	80
Dimmable	N
Flicker	<10%
Lumens Output Maximum	470 lm
Maximum Efficiency	110 lm/W
L70B50 Lifetime (h) @Ta 25 °C	15,000 h
L80B10 Lifetime (h) @Ta 25 °C	15,000 h
L90B10 Lifetime (h) @Ta 25 °C	5,000 h
Nominal Lifetime (h)	15,000 h
Blue Light Hazard	RG1
Weight	0.02Kg
Dimensions (L x W x D) (mm)	92xØ35
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)




# Filament LED Candle

07365 KFLM04CND/B22-CLR-N27-K

## Overview

The Kosnic LED Filament lamp has a traditional appearance and gives an even spread of light in all directions. It is also highly functional and efficient, giving a quality of light that creates inviting living spaces while offering huge energy savings over filament lamps without compromising on brightness.

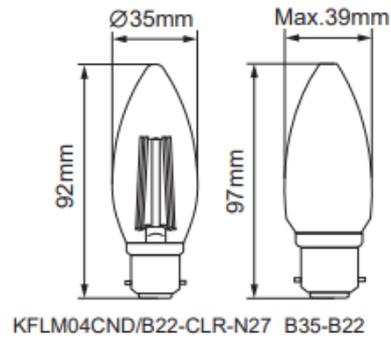

## General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	15,000 h
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

