

**SLIMLINE CEILING/WALL LIGHT 250MM DIA IP54 1056LM 12W 4000K IK10
120 BEAM NON-DIMM WHITE 88LM/W INTEGRAL**

ILBHC005



The Integral LED 12W low-energy ceiling and wall light delivers 1056 lumens, 4000K white colour temperature. Its back-lit LED design provides a 120 degree beam angle and an even light distribution. Integral IP54 Slimline ceiling and wall light has a low-profile depth of only 48mm and is suitable for all indoor areas such as hallways, stairways, walls and ceilings including bathrooms (Zone 2 and 3) and covered (sheltered) external areas, such as porches. Engineered from tough, high-grade polycarbonate material. Long life expectancy of 40,000 hours based on normal usage. Each unit is supplied with an easy installation bracket and an easy-to-follow installation guide.

Details

Quick Order Code:	529223
Barcode:	5055788215974
Category:	Luminaires
Range Name:	Slimline
Product Type:	Bulkheads-Ceiling-Wall Lights
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Features:	Standard
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Depth (mm):	48
Product Weight (g):	640
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Overall diameter (mm):	250
Construction:	Polycarbonate casing and diffuser
Bulb or Luminaire Shape:	Round
Luminaire Fixing:	Ceiling, Wall
Placement / Application:	Indoor, General Lighting
Wiring / Mounting Options:	Rear and side / BESA BOX

Electrical Data



	12
Power (W):	12
Power Consumption (W) :	0.9
Power Factor:	200-240
Voltage Range (v):	150
Amperage (mA):	Non-Dimmable
Dimming:	Yes
Driver Included:	AC
Electric Current:	No
Emergency Lumens (lm):	EN-60598
EN:	Yes
LVD Certified:	

Light Data

Luminous Flux in Lumens (lm):	1056
Luminous efficacy (lm/W):	88
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	40000
Sensor / Override:	No
Switching Cycles:	20000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	F
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08, IK10
IP Rating (Ingress Protection):	IP54
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	45

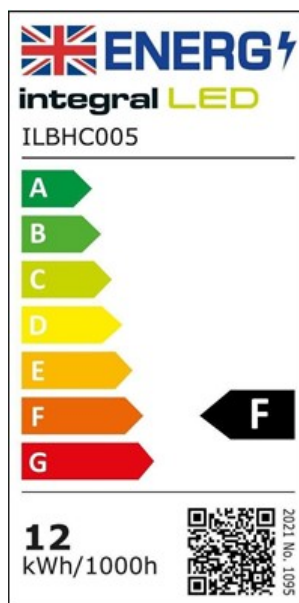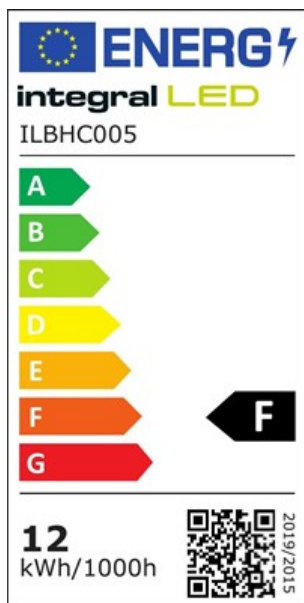

Packaging

Package Weight (g):	780
Package Length (mm):	260
Package Width (mm):	260
Package Depth (mm):	57
Qty per euro pallet:	360

[Portal.integral-led.com](https://portal.integral-led.com)