

RCD FUSED SPUR ACTIVE - 30MA




Suitable for use with all electrical appliances, in public washrooms and areas where water is present, plus fixed electric appliances such as domestic machines in the home, cold drink dispensers and hotel hairdryers.


- Electrical latching - Needs to be reset after a power failure
- High intensity LED power on indicator, clear visual indicator of power on
- Mechanical flag trip indicator
- Integral cord outlet and cable clamp
- Fuse holder can be locked out for safety
- Twin earth terminals



H92WPAAN-C

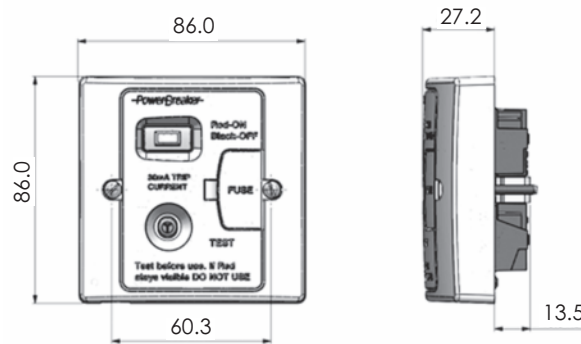

H92MPAAN-C

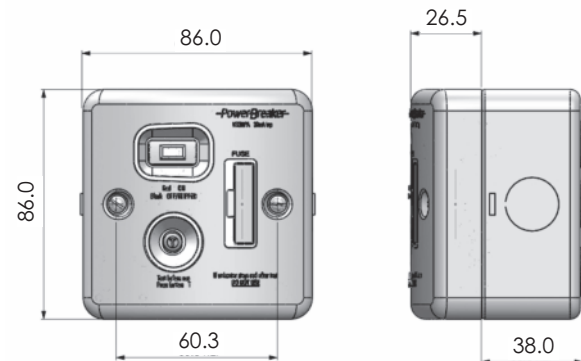

	H92WPAAN-C	H92MPAAN-C
Product Finish	White	Metal
Product Dimensions	86 x 86 x 27.2mm	86 x 86 x 26.5mm
Product weight	195g	392g
Barcode	5012739 643200	5012739 643323
Voltage	230V AC 50Hz	230V AC 50Hz
Max Operating Current	13A (13A inductive)	13A (13A inductive)
Rated Trip Current	30mA	30mA
Typical Trip Speed	Less than 20mS (typical)	Less than 20mS (typical)
RCD Contact break	Double Pole	Double Pole
Latching	Electrical, needs to be reset after a power failure (Active)	Electrical, needs to be reset after a power failure (Active)
Responsive to	Pulsating DC earth faults	Pulsating DC earth faults
Main housing material	Polycarbonate	Steel
Guarantee	1 Year	1 Year
Conforms to	BS1363-4:1995 Amd 1,2,3 & BS 7288:1990 Amd 1	BS1363-4:1995 Amd 1,2,3 & BS 7288:1990 Amd 1
EMC Emissions	EN 55014-1:2006 & EN 55014-1:2000 inc A1:2001 & A2:2002	EN 55014-1:2006 & EN 55014-1:2000 inc A1:2001 & A2:2002
EMC Immunity	EN 61543:1995 inc A11:2003, A12:2005 & A2:2006	EN 61543:1995 inc A11:2003, A12:2005 & A2:2006

TECHNICAL DATA SHEET



Tel +44 (0) 1279 772 772
 Fax +44 (0) 1279 422 007
 www.greenbrook.co.uk

