

IP67 Industrial Plugs 63A - 125A

Specifications and Dimensions

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to. Terminals, including factory fitted, should be checked periodically to ensure correct tightness. **DO NOT USE POWER TOOLS ON THESE PRODUCTS.**

ERIS offers a comprehensive range of industrial plugs and sockets ranging from 16A to 125A to suit all environments and applications. All products are RoHS compliant and are produced strictly according to international standard IEC 60309-1, IEC 60309-2.

ERIS Plugs and sockets are manufactured to be used in a wide variety of industry from Petroleum and Chemical industry, quarry plants, airports, building sites, processing industry, water and sewerage plants, hotel, ports and mining.

The ERIS plugs and sockets are corrosion and impact resistant, IP rated – sealed against levels of dust and water ingress. Products have an operating temperature range of -25°C to 50°C.

All products have an operating voltage up to 690V AC in varying pin configurations and are also colour coded to identify operation voltage.

For any further comments or assistance please contact:

eris-eu.com



Industrial

IP67 Industrial Plugs 63A-125A

Specifications and Dimensions



Part No	Description
ERS6332P7	63A 2P+E 240V
ERS6344P7	63A 3P+E 415V
ERS6354P7	63A 3P+N+E 415V
ERS12544P7	125A 3P+E 415V
ERS12554P7	125A 3P+N+E 415V

Available in the following pin options:

3 Pin: 2P+E



4 Pin: 3P+E




5 Pin: 3P+N+E



Dimensions:

Current	63A			125A			
	Pole	3	4	5	3	4	5
A (mm)		260	260	260	301	301	301
B (mm)		113.5	113.5	113.5	126	126	126
C (mm)		32	32	32	45	45	45
Cable size (mm ²)		6~16			16~50		

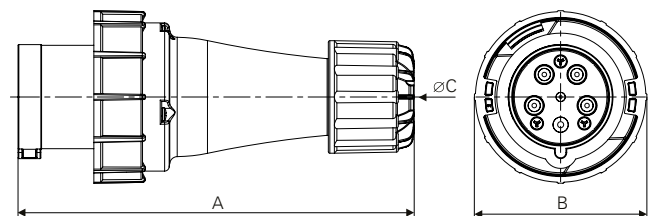

For any further comments or assistance please contact:

eris-eu.com