


LED 25,000hr Tubes

LED tubes are used in a number of commercial and industrial settings. Available in various lengths with compatible battens (please see page 64), Energizer tubes provide value for money across the range. CCT Adjustable options available.



- 25,000 hour life
- 50,000 switching cycles
- 2700K, 4000K & 6500K
- Colour rendering index ≥80
- Opal finish
- 3 Colour temps; 2,700K, 4,000K and 6,500K
- 2 Caps; S15 and G13
- Recommended for indoor use only

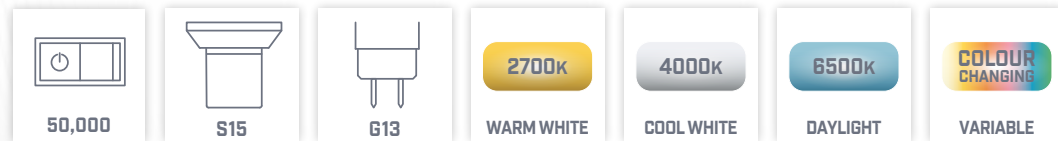


S Code	Size	Wattage	Lumen	Cap	Temp	Dimmable	CDU Qty	Energy Class
S15 Strip tube								
S9217	221mm	4W	350lm	S15	2700K	No	12	F
S9218	284mm	6W	550lm	S15	2700K	No	12	F
T8								
S9912	2ft	9W	1080lm	G13	4000K	No	12	E
S9913	2ft	9W	1080lm	G13	6500K	No	12	E
S28632	2ft	9W	1080lm	G13	CCT Adjustable	No	25	E
S8912	4ft	18W	2160lm	G13	4000K	No	12	E
S8914	4ft	18W	2160lm	G13	6500K	No	12	E
S28633	4ft	18W	2160lm	G13	CCT Adjustable	No	25	E
S8913	5ft	22W	2649lm	G13	4000K	No	12	E
S8915	5ft	22W	2649lm	G13	6500K	No	12	E
S28634	5ft	22W	2649lm	G13	CCT Adjustable	No	25	E
S9914	6ft	30W	3600lm	G13	4000K	No	12	E
S9915	6ft	30W	3600lm	G13	6500K	No	12	E
S29325	6ft	30W	3600lm	G13	CCT Adjustable	No	25	E

Halogen Range

Linear halogen bulbs are commonly used in security lights, floodlights and up-lighters. They are available in two standard sizes, 78mm or 118mm, both of which have R7s caps. All halogen linear bulbs are dimmable.



- 2,000 hour life
- 8,000 switching cycles
- 2900K
- Colour rendering index = 100
- Clear finish
- 1 Cap; Linear cap
- Recommended for external weather-proof fitting

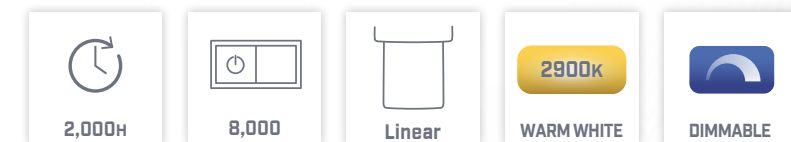

S Code	Size	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Energy Class
S5773	78x8mm	80W	1400lm	R7S	2900K	Dimmable	50	G
S5160*	78x8mm	120W	2250lm	R7S	2900K	Dimmable	10	G
S5414	78x8mm	120W	2250lm	R7S	2900K	Dimmable	50	G
S5161*	118x8mm	120W	2250lm	R7S	2900K	Dimmable	10	G
S5415	118x8mm	120W	2250lm	R7S	2900K	Dimmable	50	G

* Blister packaging of 2