




### Specifications

Floor Cut Out:	303mm x 221mm
Depth:	80mm
Plug Top Clearance:	28mm
Overall Frame & Lid:	313mm x 230mm
Frame Lid Recess:	6mm
Accessory Plates:	185mm x 89mm

### Product Description

- Floor box manufactured from galvanised steel
- 25 & 20mm knockouts to accept flexible conduit
- Frame & lid moulded from high impact polycarbonate (RAL7031)
- Galvanised lid insert for strength
- Easy grip recessed lifting handle
- Clamp fixing for fast installation
- Large range of accessory plate, colour equivalent: RAL7035
- Designed specifically to accept STO291/RCD Twin RCD Protected Sockets
- Suitable for carpeted floors only with standard Frame & Lid
- Clean Earth Sockets available
- ABS Plastic Frame & Lid Load Test 550 KG
- Steel Frame & Lid Load Test 740 KG

### Plug Top Clearance Diagram

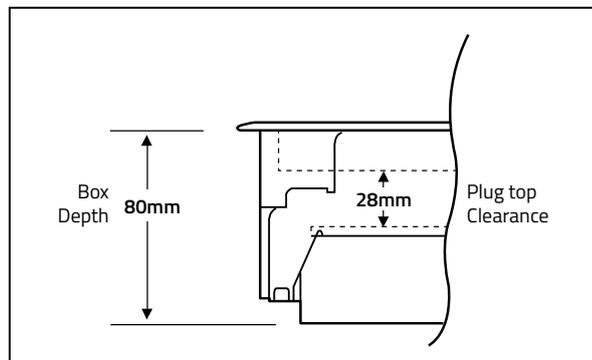

### New Plastic RCD Protected Switched Sockets

The TFB3/80 is designed specifically with a deeper base (wiring) section to accommodate RCD protected sockets, this unit is now available with our new moulded plastic RCD flush mounted socket plate 'STO291/RCD/FM', offering our customers a lower overall cost for a floorbox and an RCD plate set, *see illustrations to right for example plate combinations.*

