



LED MIRROR LIGHT WITH SHAVER SOCKET

- Pull cord on/off switch
 - Diffused rectangular light apertures
 - Permanent power to integrated dual voltage shaver socket: eliminates the need for separate shaver socket
 - Safety isolating transformer on shaver outlet
 - Pressed steel base
 - Glass mirror
 - Eterna 2 year warranty
- M.O.M: 1 / O.P.Q: 1

LED LAMP SPECIFICATIONS:	
Luminaire lumens (with diffuser)	130 lm
Lumens from chip (no diffuser)	820 lm
Useful lumens	762 lm
Rated Wattage	10.3W
Rated luminous flux	762 lm
Nominal life time of the lamp	30,000 hrs
Colour temperature	3000K
Number of switching cycles before premature lamp failure	15,000
Warm-up time up to 60% of the full light output	Instant full light
Dimmable	No
Nominal beam angle	120°
Rated power	10.3W
Rated lamp lifetime	30,000 hrs
Lamp power factor	>0.5
Lumen maintenance factor at end of nominal life	70%
Starting time	<0.5s
Colour rendering	>80
Colour consistency	Within a six step Macadam ellipse
Rated peak intensity	246cd
Rated beam angle	120°
Voltage / Frequency	240V~50Hz
Not suitable for accent lighting	

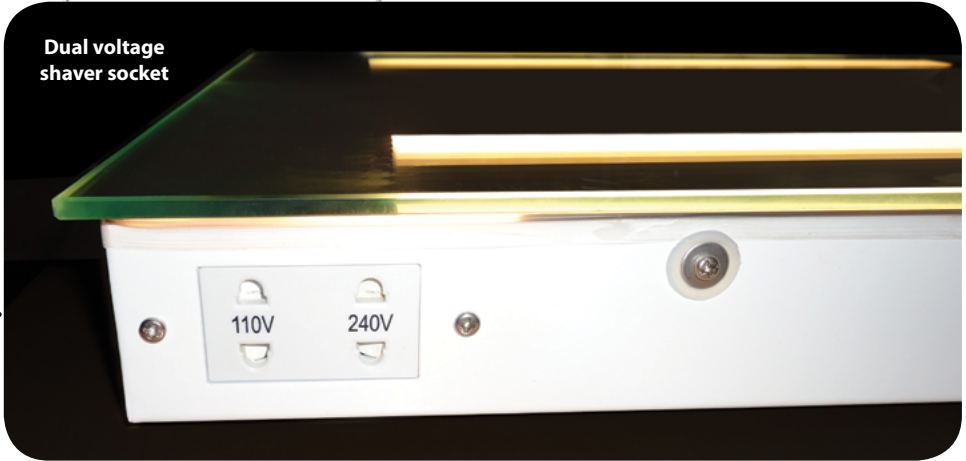

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating
LEDMIRROR	White	10.3W	3000K	130 lm	30,000 hrs	IP44