

LUXFIRE FIRE RATED TILTABLE DOWNLIGHT 92MM CUTOUT IP65 430LM 6W 3000K 36 BEAM DIMMABLE 72LM/W WHITE INTEGRAL

ILD LFR92C001



Style, safety and flexibility - Integral LED Lux Fire Tilttable downlights not only conform to 30, 60 and 90mins fire rating specifications but are also rated to IP65, so they can be used safely in bathrooms. Lux Fire Tilttable fire-rated downlights have been tailored to deliver a premium finish to any home or business with their low-glare, high-quality light and contemporary design that looks impressive in any setting. This adjustable fitting can be tilted to illuminate specific areas or features in a room. Lux Fire downlights are built using a deep recessed COB LED light source, providing a beam that has softened edges for a luxurious effect. Complete with Loop-in / Loop-out driver. IP65 and Air tightness compliant with Part C and Part L. Resistance to Sound compliant with Part E.

Details

Quick Order Code:	793057
Barcode:	5055788223795
Category:	Downlights
Range Name:	Lux Fire
Product Type:	Fire Rated
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Finish:	Matt White
Features:	Tilttable
Fixed/Tilttable:	Tilttable
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	64
Product Weight (g):	420
Optic:	Clear Refractor
Material:	Aluminium alloy, Acrylic, Iron
Overall diameter (mm):	100
Construction:	Extruded Aluminium alloy heat-sink, Iron body, Steel springs and mounting plate, Acrylic diffuser
Cut Out Diameter (mm):	92
Luminaire Fixing:	Recess mounted
Placement / Application:	Indoor, General Lighting

Spot Type: COB

Electrical Data


Power (W): 6
Power Consumption (W) : 6
Power Factor: 0.89
Voltage Range (v): 220-240
Wattage equivalent (W): 40
Amperage (mA): 500
Dimming: Dimmable
Driver Included: Yes
Electric Current: AC
EN: EN-60598
LVD Certified: Yes

Light Data

Luminous Flux in Lumens (lm): 430
Luminous efficacy (lm/W): 72
Correlated Colour Temperature (CCT) (K): 3000
Colour Temperature: 3000K - Warm White
Colour Temperature Name: Warm White
Beam Angle: 36
Colour Rendering Index (CRI): 80
Compatible Dimmers: Varilight JQP401W
Fire Rating (mins): 30, 60, 90
Frequency Range (Hz): 50/60
Instant on (Less than 1 second): Yes
LED Type: Chip on board (COB)
Lifetime (hours): 35000
Switching Cycles: 17500

Environment

EN: EN-60598
LVD Certified: Yes
CE RoHS: Yes
New Energy Rating: G
EU Luminaire: L
Hg 0% (Mercury Free): Yes
IP Rating (Ingress Protection): IP65
Lowest Operating Temperature (°C): -20
Maximum Operating Temperature (°C): 45

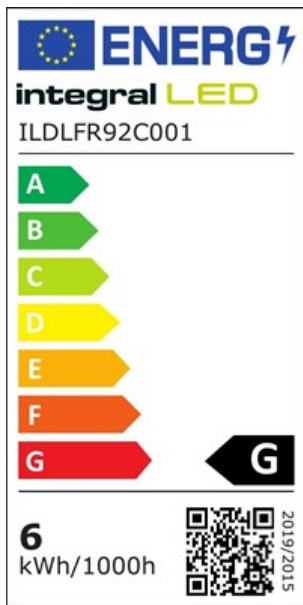

Packaging

Package Weight (g):	440
Package Length (mm):	110
Package Width (mm):	110
Package Depth (mm):	85

[Portal.integral-led.com](https://portal.integral-led.com)