

**R63 BULB E27 875LM 9.5W 3000K DIMMABLE 120 BEAM INTEGRAL**

ILR63DD005



This 9.5W retrofit Integral LED R63 delivers brightness similar to a 54W incandescent bulb. It is dimmable, with a warm white light. It features a 700 lumen output, multi LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms, bathroom and bedrooms, in classic or modern wall lamp fittings.

**Details**

<b>Barcode:</b>	5055788227045
<b>Quick Order Code:</b>	'018055
<b>Category:</b>	Lamps
<b>Range Name:</b>	Reflector
<b>Product Type:</b>	Reflector
<b>Product Body Finish:</b>	Matt white
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Finish:</b>	Matt White
<b>Warranty (Years):</b>	3

**Physical Data**

<b>Product Length (mm):</b>	100
<b>Product Width (mm):</b>	63
<b>Product Weight (g):</b>	62
<b>Material:</b>	Aluminium, Polycarbonate
<b>Base Term:</b>	Edison screw
<b>Bulb Base:</b>	E27
<b>Construction:</b>	Plastic heat-sink, Plastic diffuser
<b>Globe Finish:</b>	Frosted
<b>Globe Type:</b>	Reflector R63
<b>Bulb Fixing:</b>	Pendant, Wall
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	9.5
<b>Power Consumption (W) :</b>	9.5
<b>Power Factor:</b>	0.8
<b>Voltage Range (v):</b>	220-240



<b>Wattage equivalent (W):</b>	60
<b>Amperage (mA):</b>	47
<b>Dimming:</b>	Mains dim
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	875
<b>Luminous efficacy (lm/W):</b>	92
<b>Correlated Colour Temperature (CCT) (K):</b>	3000
<b>Colour Temperature:</b>	3000 - Warm White
<b>Colour Temperature Name:</b>	Warm White
<b>Beam Angle:</b>	120
<b>Colour Rendering Index (CRI):</b>	80
<b>Frequency Range (Hz):</b>	50/60
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Surface mounted device (SMD)
<b>Lifetime (hours):</b>	25000
<b>Switching Cycles:</b>	50000

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>New Energy Rating:</b>	F
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

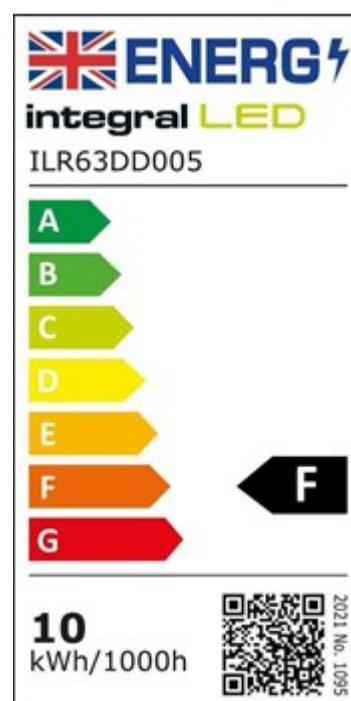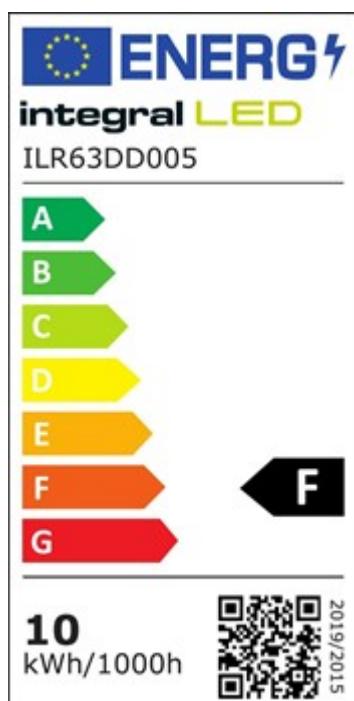

## Packaging

<b>Barcode:</b>	5055788227045
<b>Single box qty:</b>	1
<b>Package Weight (g):</b>	100
<b>Package Length (mm):</b>	124
<b>Package Width (mm):</b>	67
<b>Package Depth (mm):</b>	67
<b>Inner Carton Barcode:</b>	05055788227052
<b>Qty per Inner Carton :</b>	10
<b>Inner Carton Length (mm):</b>	350
<b>Inner Carton Width (mm):</b>	145
<b>Inner Carton Depth (mm):</b>	135
<b>Outer Carton Barcode:</b>	05055788227069
<b>Qty per Outer Carton:</b>	50
<b>Outer Carton Length (mm):</b>	740
<b>Outer Carton Width (mm):</b>	370
<b>Outer Carton Depth (mm):</b>	155
<b>Qty per euro pallet:</b>	1500

---

[Integral-led.com](http://Integral-led.com) - Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE