

G4 BULB 105LM 1W 4000K NON-DIMM 300 BEAM CLEAR INTEGRAL

ILG4NE004



Integral LED G4 lamps run at 1W and offer a lifetime of thousands of hours more than their halogen equivalents. This makes them an ideal retrofit for existing G4 fittings.

Details

Quick Order Code:	425216
Barcode:	5055788224518
Category:	Lamps
Range Name:	G4
Product Type:	G4
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	33
Product Width (mm):	10
Product Weight (g):	2
Material:	Silicone
Base Term:	G4
Bulb Base:	G4
Construction:	Silicone
Globe Finish:	Clear
Bulb Fixing:	Pendant, Wall, Desktop
Bulb or Luminaire Shape:	Oval
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	1
Power Consumption (W) :	1
Power Factor:	0.7
Voltage Range (v):	12
Wattage equivalent (W):	10
Amperage (mA):	124
Dimming:	Non-Dimmable

Driver Included:
Electric Current:
EN:



No, needs 12V AC/DC Transformer
AC/DC
EN 61547:2009

Light Data

Luminous Flux in Lumens (lm): 105
Luminous efficacy (lm/W): 105
Correlated Colour Temperature (CCT) (K): 4000
Colour Temperature: 4000K - Cool White
Colour Temperature Name: Cool White
Beam Angle: 300
Colour Rendering Index (CRI): 80
Frequency Range (Hz): 50/60
Instant on (Less than 1 second): Yes
LED Type: COB
Lifetime (hours): 15000
Switching Cycles: 50000

Environment

EN: EN 61547:2009
CE RoHS: Yes
Previous Energy Rating: A++
New Energy Rating: F
Hg 0% (Mercury Free): Yes
IP Rating (Ingress Protection): IP20
Lowest Operating Temperature (°C): -20
Maximum Operating Temperature (°C): 40

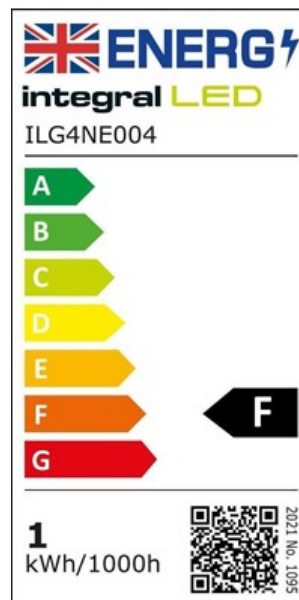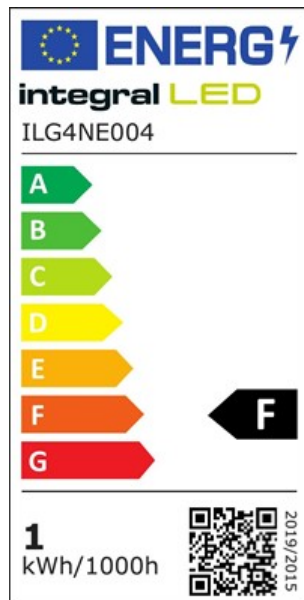

Packaging

Package Weight (g): 3
Package Length (mm): 36
Package Width (mm): 15
Package Depth (mm): 15
Qty per euro pallet: 80000

[Portal.integral-led.com](https://portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE