

G4 BULB 110LM 1W 4000K NON-DIMM 320 BEAM CLEAR INTEGRAL

ILG4NE004



Integral LED G4 lamps run at 1W and offer a lifetime of thousands of hours more than their halogen equivalents. This makes them an ideal retrofit for existing G4 fittings.

Details

| | |
|--------------------------|---------------------------------------|
| Barcode: | 5055788224518 |
| Quick Order Code: | 425216 |
| Category: | Lamps |
| Range Name: | G4 |
| Product Type: | G4 |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |

Physical Data

| | |
|----------------------------------|--------------------------|
| Product Length (mm): | 33 |
| Product Width (mm): | 10 |
| Product Weight (g): | 2 |
| Material: | Silicone |
| Base Term: | G4 |
| Bulb Base: | G4 |
| Construction: | Silicone |
| Globe Finish: | Clear |
| Bulb Fixing: | Pendant, Wall, Desktop |
| Bulb or Luminaires Shape: | Oval |
| Placement / Application: | Indoor, General Lighting |

Electrical Data

| | |
|--------------------------------|---------------------------------|
| Power (W): | 1 |
| Power Consumption (W) : | 1 |
| Power Factor: | 0.7 |
| Voltage Range (v): | 12 |
| Wattage equivalent (W): | 10 |
| Amperage (mA): | 124 |
| Dimming: | Non-Dimmable |
| Driver Included: | No, needs 12V AC/DC Transformer |

Electric Current:
EN:



AC/DC
EN 61547:2009

Light Data

| | |
|-------------------------------------------------|-------------------|
| Luminous Flux in Lumens (lm): | 110 |
| Luminous efficacy (lm/W): | 105 |
| Correlated Colour Temperature (CCT) (K): | 4000 |
| Colour Temperature: | 4000 - Cool White |
| Colour Temperature Name: | Cool White |
| Beam Angle: | 300 |
| Colour Rendering Index (CRI): | 80 |
| Frequency Range (Hz): | 50/60 |
| Instant on (Less than 1 second): | Yes |
| LED Type: | COB |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 50000 |

Environment

| | |
|--------------------------------------------|---------------|
| EN: | EN 61547:2009 |
| CE RoHS: | Yes |
| New Energy Rating: | F |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -20 |
| Maximum Operating Temperature (°C): | 40 |

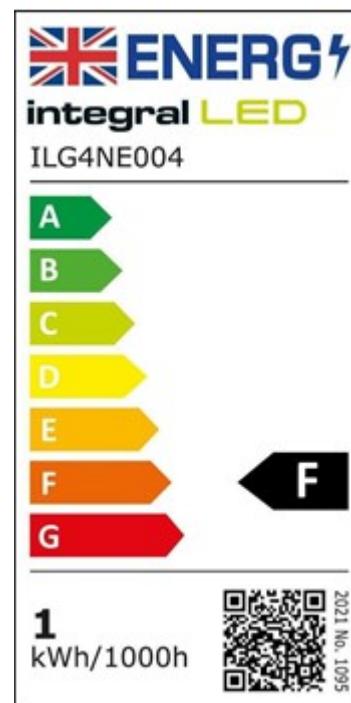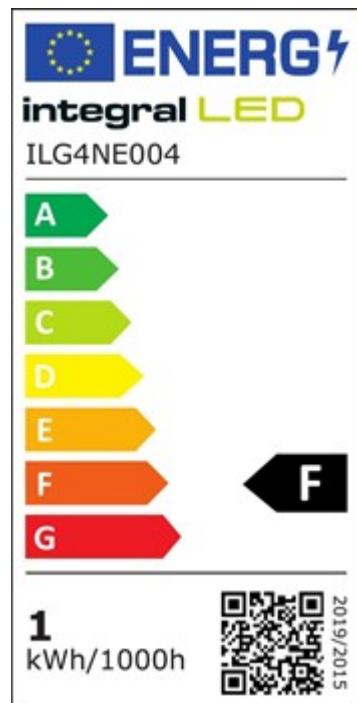

Packaging

| | |
|-----------------------------|---------------|
| Barcode: | 5055788224518 |
| Single box qty: | 1 |
| Package Weight (g): | 3 |
| Package Length (mm): | 36 |
| Package Width (mm): | 15 |

| | |
|----------------------------------|----------------|
| Package Depth (mm): | 15 |
| Inner Carton Barcode: | 05055788224563 |
| Qty per Inner Carton : | 100 |
| Inner Carton Length (mm): | 165 |
| Inner Carton Width (mm): | 165 |
| Inner Carton Depth (mm): | 45 |
| Outer Carton Barcode: | 05055788224600 |
| Qty per Outer Carton: | 1000 |
| Outer Carton Length (mm): | 320 |
| Outer Carton Width (mm): | 290 |
| Outer Carton Depth (mm): | 200 |
| Qty per euro pallet: | 80000 |

Integral-led.com - Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE