

**G4 BULB 200LM 1.6W 2700K NON-DIMM 320 BEAM CLEAR INTEGRAL**

ILG4NC005



Integral LED G4 lamps run at 1.5W and offer a lifetime of thousands of hours more than their halogen equivalents. This makes them an ideal retrofit for existing G4 fittings.

**Details**

<b>Barcode:</b>	5055788224525
<b>Quick Order Code:</b>	636292
<b>Category:</b>	Lamps
<b>Range Name:</b>	G4
<b>Product Type:</b>	G4
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2

**Physical Data**

<b>Product Length (mm):</b>	38, 37.5
<b>Product Width (mm):</b>	10
<b>Product Weight (g):</b>	2.2, 22
<b>Material:</b>	Silicone
<b>Base Term:</b>	G4
<b>Bulb Base:</b>	G4
<b>Construction:</b>	Silicone
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	G4
<b>Bulb Fixing:</b>	Pendant, Wall, Desktop
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	1.6
<b>Power Consumption (W) :</b>	1.6
<b>Power Factor:</b>	0.7
<b>Voltage Range (v):</b>	220-240, 12
<b>Wattage equivalent (W):</b>	25
<b>Amperage (mA):</b>	162
<b>Dimming:</b>	Non-Dimmable



<b>Driver Included:</b>	No, needs 12V AC/DC Transformer
<b>Electric Current:</b>	AC/DC
<b>EN:</b>	EN 61547:2009
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	200
<b>Luminous efficacy (lm/W):</b>	115
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700 - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	320
<b>Colour Rendering Index (CRI):</b>	80
<b>Frequency Range (Hz):</b>	50/60
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	COB
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	50000

## Environment

<b>EN:</b>	EN 61547:2009
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>New Energy Rating:</b>	E
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

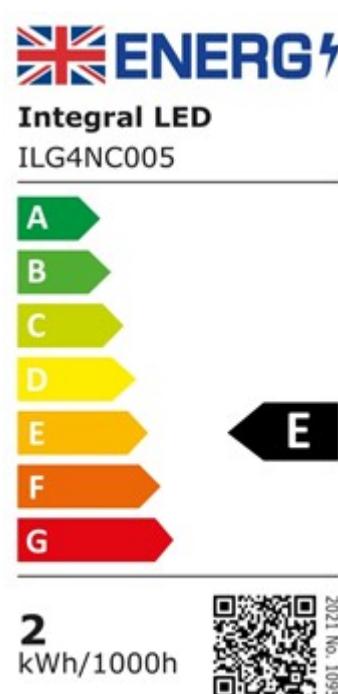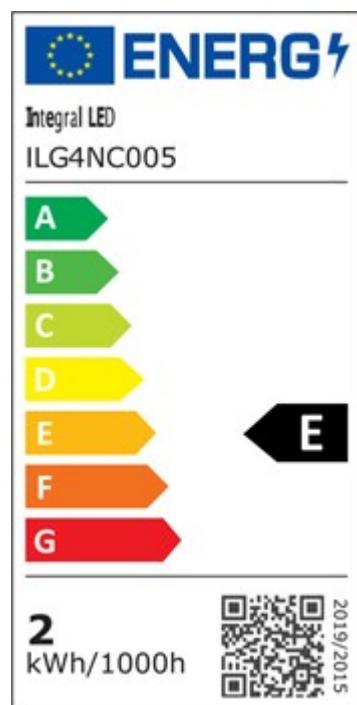

## Packaging

<b>Barcode:</b>	5055788224525
<b>Single box qty:</b>	1

<b>Package Weight (g):</b>	5.2
<b>Package Length (mm):</b>	41
<b>Package Width (mm):</b>	15
<b>Package Depth (mm):</b>	15
<b>Inner Carton Barcode:</b>	05055788224556
<b>Qty per Inner Carton :</b>	100
<b>Inner Carton Length (mm):</b>	165
<b>Inner Carton Width (mm):</b>	165
<b>Inner Carton Depth (mm):</b>	45
<b>Outer Carton Barcode:</b>	05055788224594
<b>Qty per Outer Carton:</b>	1000
<b>Outer Carton Length (mm):</b>	320
<b>Outer Carton Width (mm):</b>	290
<b>Outer Carton Depth (mm):</b>	200
<b>Qty per euro pallet:</b>	80000, 144000

---

[Integral-led.com](http://Integral-led.com) - Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE