

**OMNI FILAMENT CANDLE BULB E14 470LM 3.4W 2700K DIMMABLE 330  
BEAM CLEAR FULL GLASS INTEGRAL**

ILCANDE14D050



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

|                          |                                       |
|--------------------------|---------------------------------------|
| <b>Barcode:</b>          | 5055788227724                         |
| <b>Quick Order Code:</b> | 449722                                |
| <b>Category:</b>         | Lamps                                 |
| <b>Range Name:</b>       | Omni                                  |
| <b>Product Type:</b>     | Candle                                |
| <b>Market Segment:</b>   | Commercial indoor, Residential indoor |
| <b>Warranty (Years):</b> | 2                                     |

**Physical Data**

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| <b>Product Length (mm):</b>     | 97                                          |
| <b>Product Width (mm):</b>      | 35                                          |
| <b>Product Weight (g):</b>      | 14                                          |
| <b>Material:</b>                | Aluminium, Glass                            |
| <b>Base Term:</b>               | Small Edison screw                          |
| <b>Bulb Base:</b>               | E14                                         |
| <b>Construction:</b>            | Glass shell, Filament strip, Aluminium base |
| <b>Globe Finish:</b>            | Clear                                       |
| <b>Globe Type:</b>              | Candle                                      |
| <b>Bulb Fixing:</b>             | Pendant, Wall, lamp stand, table lamp       |
| <b>Bulb or Luminaire Shape:</b> | Oval                                        |
| <b>Placement / Application:</b> | Indoor, General Lighting                    |

**Electrical Data**

|                                |         |
|--------------------------------|---------|
| <b>Power (W):</b>              | 3.4     |
| <b>Power Consumption (W) :</b> | 3.4     |
| <b>Power Factor:</b>           | 0.7     |
| <b>Voltage Range (v):</b>      | 220-240 |
| <b>Wattage equivalent (W):</b> | 40      |


|                             |           |
|-----------------------------|-----------|
| <b>Amperage (mA):</b>       | 19        |
| <b>Dimming:</b>             | Mains dim |
| <b>Driver Included:</b>     | Yes       |
| <b>Electric Current:</b>    | AC        |
| <b>True Wattage Eq (W):</b> | 40        |
| <b>EN:</b>                  | EN-62560  |
| <b>LVD Certified:</b>       | Yes       |

## Light Data

|                                                 |                   |
|-------------------------------------------------|-------------------|
| <b>Luminous Flux in Lumens (lm):</b>            | 470               |
| <b>Luminous efficacy (lm/W):</b>                | 138               |
| <b>Correlated Colour Temperature (CCT) (K):</b> | 2700              |
| <b>Colour Temperature:</b>                      | 2700K - Warm      |
| <b>Colour Temperature Name:</b>                 | Warm              |
| <b>Beam Angle:</b>                              | 330               |
| <b>Colour Rendering Index (CRI):</b>            | 80                |
| <b>Compatible Dimmers:</b>                      | Varilight JQP401W |
| <b>Frequency Range (Hz):</b>                    | 50                |
| <b>Instant on (Less than 1 second):</b>         | Yes               |
| <b>LED Type:</b>                                | Filament chip     |
| <b>Lifetime (hours):</b>                        | 15000             |
| <b>Switching Cycles:</b>                        | 50000             |

## Environment

|                                            |          |
|--------------------------------------------|----------|
| <b>EN:</b>                                 | EN-62560 |
| <b>LVD Certified:</b>                      | Yes      |
| <b>CE RoHS:</b>                            | Yes      |
| <b>New Energy Rating:</b>                  | D        |
| <b>Hg 0% (Mercury Free):</b>               | Yes      |
| <b>IP Rating (Ingress Protection):</b>     | IP20     |
| <b>Lowest Operating Temperature (°C):</b>  | -20      |
| <b>Maximum Operating Temperature (°C):</b> | 40       |

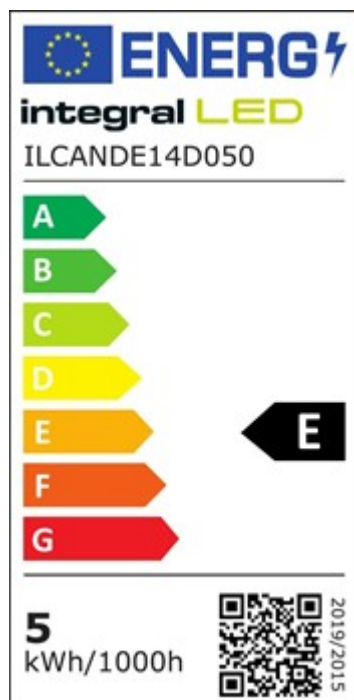

## Packaging

|                           |                |
|---------------------------|----------------|
| Barcode:                  | 5055788227724  |
| Single box qty:           | 1              |
| Package Weight (g):       | 24             |
| Package Length (mm):      | 50             |
| Package Width (mm):       | 50             |
| Package Depth (mm):       | 110            |
| Inner Carton Barcode:     | 05055788227731 |
| Qty per Inner Carton :    | 10             |
| Inner Carton Length (mm): | 226            |
| Inner Carton Width (mm):  | 110            |
| Inner Carton Depth (mm):  | 120            |
| Outer Carton Barcode:     | 05055788227748 |
| Qty per Outer Carton:     | 60             |
| Outer Carton Length (mm): | 356            |
| Outer Carton Width (mm):  | 286            |
| Outer Carton Depth (mm):  | 270            |
| Qty per euro pallet:      | 2880           |