

**OMNI FILAMENT CANDLE BULB B15 470LM 3.4W 2700K DIMMABLE 330  
BEAM CLEAR FULL GLASS INTEGRAL**

ILCANDB15D051



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

<b>Barcode:</b>	5055788227762
<b>Quick Order Code:</b>	334850
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Product Type:</b>	Candle
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2

**Physical Data**

<b>Product Length (mm):</b>	95
<b>Product Width (mm):</b>	35
<b>Product Weight (g):</b>	14
<b>Material:</b>	Aluminium, Glass
<b>Base Term:</b>	Small Bayonet cap
<b>Bulb Base:</b>	B15
<b>Construction:</b>	Glass shell, Filament strip, Aluminium base
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	Candle
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	3.4
<b>Power Consumption (W) :</b>	3.4
<b>Power Factor:</b>	0.7
<b>Voltage Range (v):</b>	220-240
<b>Wattage equivalent (W):</b>	40



<b>Amperage (mA):</b>	19
<b>Dimming:</b>	Mains dim
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>True Wattage Eq (W):</b>	40
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	470
<b>Luminous efficacy (lm/W):</b>	138
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	330
<b>Colour Rendering Index (CRI):</b>	80
<b>Compatible Dimmers:</b>	Varilight JQP401W
<b>Frequency Range (Hz):</b>	50
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Filament chip
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	50000

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>New Energy Rating:</b>	D
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

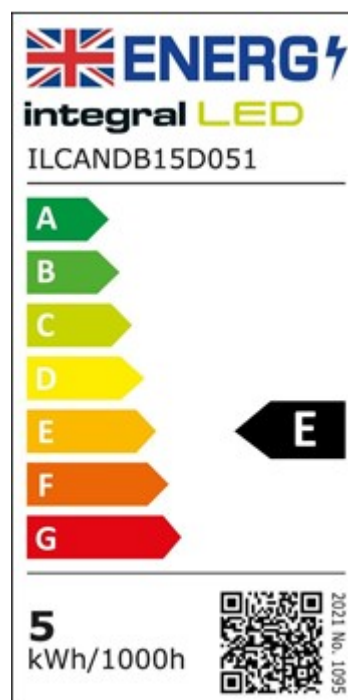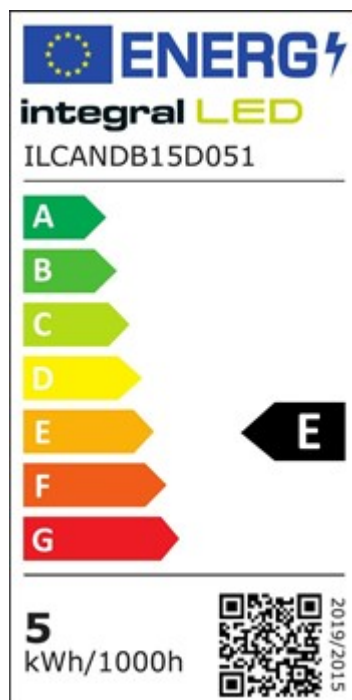

## Packaging

Barcode:	5055788227762
Single box qty:	1
Package Weight (g):	24
Package Length (mm):	50
Package Width (mm):	50
Package Depth (mm):	110
Inner Carton Barcode:	05055788227779
Qty per Inner Carton :	10
Inner Carton Length (mm):	226
Inner Carton Width (mm):	110
Inner Carton Depth (mm):	120
Outer Carton Barcode:	05055788227786
Qty per Outer Carton:	60
Outer Carton Length (mm):	356
Outer Carton Width (mm):	286
Outer Carton Depth (mm):	270
Qty per euro pallet:	2880