



TWIN SPOT

TWIN-2X15NW

QVIS®

LIGHTING & SECURITY




Q-DRIVE

Driver as Standard


EPISTAR

LED's inside

TECHNICAL DRAWINGS

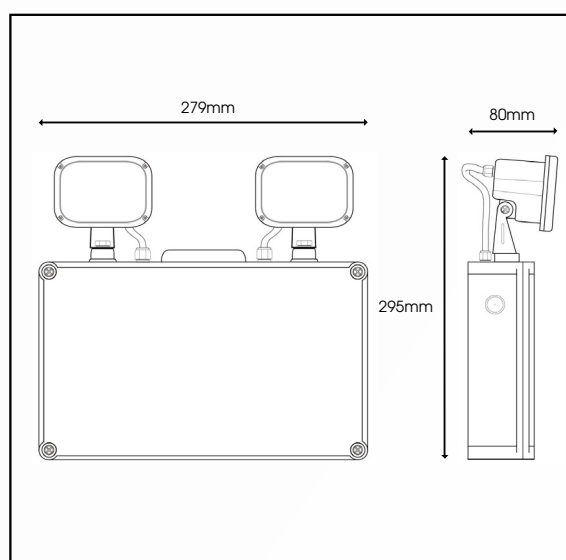

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

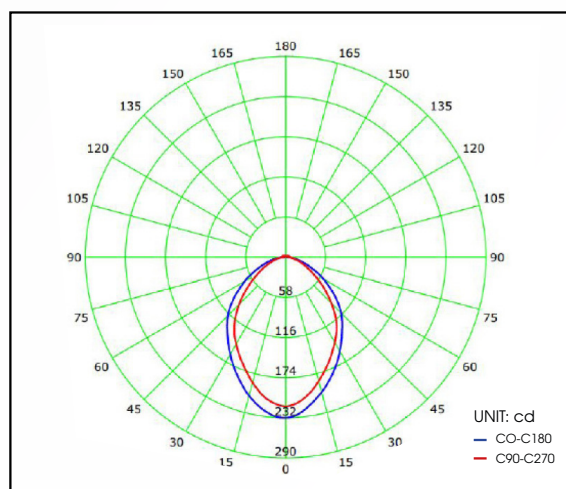

Specification	TWIN 2X15
System Power	10W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
IP Rating	IP65
Lumen Output	550Lm
Colour Temperature	4000K
Housing Material	Polycarbonate
Discharge Duration	3 hours
Operating Temperature	-20 to 40 °C
Input Voltage	AC200-240V
Beam Angle	60 °
Emergency	Non-maintained
Weight	1.65kg
Dimensions	279mm x 295mm x 80mm
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply