


SFX/TC-2-PVC-WHT

Budget 2pr CCS Telecom Cable White PVC

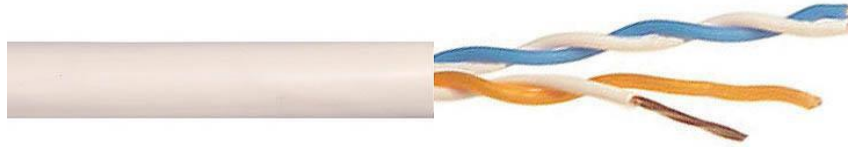

Cable Construction	2 Pairs	
Conductor	Copper Clad Steel	
Conductor Diameter (mm)	0.50 ±0.02	
Insulation	PVC	
Insulation Thickness (mm)	0.185	
Insulation Diameter (mm)	0.90 ±0.10	
Insulation Colours and Lay (mm)		
Pair 1; Pair 2	White/Blue,Blue/White,<100	White/Orange,Orange/White,<100
Nylon Rip-Cord	210D	
Jacket	PVC	
Jacket Thickness (mm)	0.45	
Overall Diameter (mm)	4.10 ±0.20	
Jacket Colour	White RAL 9003	
Sheath Printing	CCS Telecom 2 PR RoHS2 (m)	
Reaction to Fire	Fca	
Electrical Characteristics		
Max Conductor DC resistance @ 20°C	<501.9Ω/km	
Rated Temperature	80°C	
Rated Voltage	30V	
Insulation Resistance @20°C	>200MΩ/km	