


SFX/TC-3-PVC-WHT

Budget 3pr CCS Telecom Cable White PVC

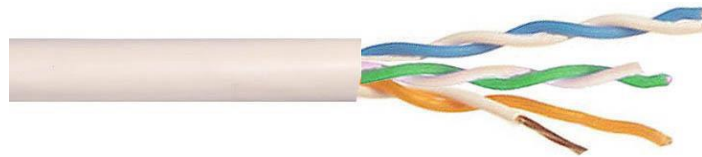

Cable Construction	3 Pairs	
Conductor	Copper Clad Steel	
Conductor Diameter (mm)	0.50 ±0.02	
Insulation	PVC	
Insulation Thickness (mm)	0.185	
Insulation Diameter (mm)	0.90 ±0.10	
Insulation Colours and Lay (mm)		
Pair 1; Pair 2	White/Blue,Blue/White,53	White/Orange,Orange/White,56
Pair 3	White/Green,Green/White,58	
Nylon Rip-Cord	210D	
Jacket	PVC	
Jacket Thickness (mm)	0.45	
Overall Diameter (mm)	4.20 ±0.20	
Jacket Colour	White RAL 9003	
Sheath Printing	CCS Telecom 3 PR RoHS2 (m)	
Reaction to Fire	Fca	
Electrical Characteristics		
Max Conductor DC resistance @ 20°C	<501.9Ω/km	
Rated Temperature	80°C	
Rated Voltage	30V	
Insulation Resistance @20°C	>200MΩ/km	