


**SFX/TC-4-PVC-WHT**

Budget 4pr CCS Telecom Cable White PVC

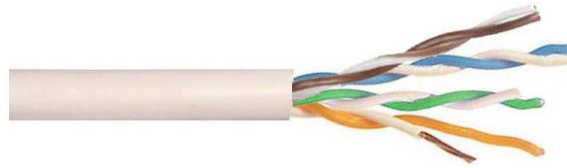

<b>Cable Construction</b>	4 Pairs	
Conductor	Copper Clad Steel	
Conductor Diameter (mm)	0.50 ±0.02	
<b>Insulation</b>	PVC	
Insulation Thickness (mm)	0.185	
Insulation Diameter (mm)	0.90 ±0.10	
<b>Insulation Colours and Lay (mm)</b>		
Pair 1; Pair 2	White/Blue,Blue/White,53	White/Orange,Orange/White,56
Pair 3; Pair 4	White/Green,Green/White,58	White/Brown,Brown/White,61
Nylon Rip-Cord	210D	
Jacket	PVC	
Jacket Thickness (mm)	0.45	
Overall Diameter (mm)	4.60 ±0.20	
Jacket Colour	White RAL 9003	
Sheath Printing	CCS Telecom 4 PR RoHS2 (m)	
Reaction to Fire	Fca	
<b>Electrical Characteristics</b>		
Max Conductor DC resistance @ 20°C	<501.9Ω/km	
Rated Temperature	80°C	
Rated Voltage	30V	
Insulation Resistance @20°C	>200MΩ/km	