


230V IP65 LED Single Non-Corrosive Fitting



MLA part code	TRLED12	TRLED14	TRLED15	TRLED16
Description	230V IP65 Single LED Non-Corrosive Fitting			
Finish	Grey with opal diffuser			
Nett weight (kg)	0.57	1.5	2	2.8
Wattage (W)	14	23	29	33
Lumens (lm)	1530 ± 5%	2650 ± 5%	3650 ± 5%	4100 ± 5%
Efficacy (lm/W)	112	110	128	122
Dimensions (mm)	Width - 94 Length - 653 Projection - 90	Width - 94 Length - 1263 Projection - 90	Width - 94 Length - 1563 Projection - 90	Width - 94 Length - 1828 Projection - 90
CCT	4000K			
LED Colour	Cool white			
Beam angle (°)	140	135	135	145
CRI	>80			
Power factor	0.921	0.936	0.942	0.929
Life span (Hrs)	25,000			
Input voltage	Mains 230V 50Hz			
Construction	Polycarbonate			
Insulation class	Class I			
IP rating	IP65			
Warranty	5 years			
Dimmable	No			
Origin of Manufacture	China			
Declaration of Conformity (held on file)	Yes			
Manufactured in accordance with	BS EN60598			
EAN	5055832970934	5055832970781	5055832970996	5055832971047

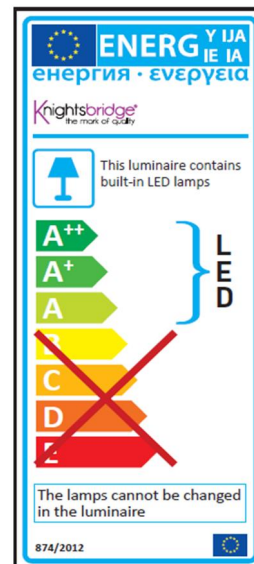