



Rigid SM1 breaker-contactor connections
SM1X
Rigid SM1P breaker - BF09..25A contactor connections.
SM1P...

Product designation

Product type designation

Description

Accessories for

Operational characteristics

IEC maximum current (Imax)	A	25
----------------------------	---	----


Mechanical features

Operating position

normal	Other
--------	-------

Weight	g	35
--------	---	----

Dimensions

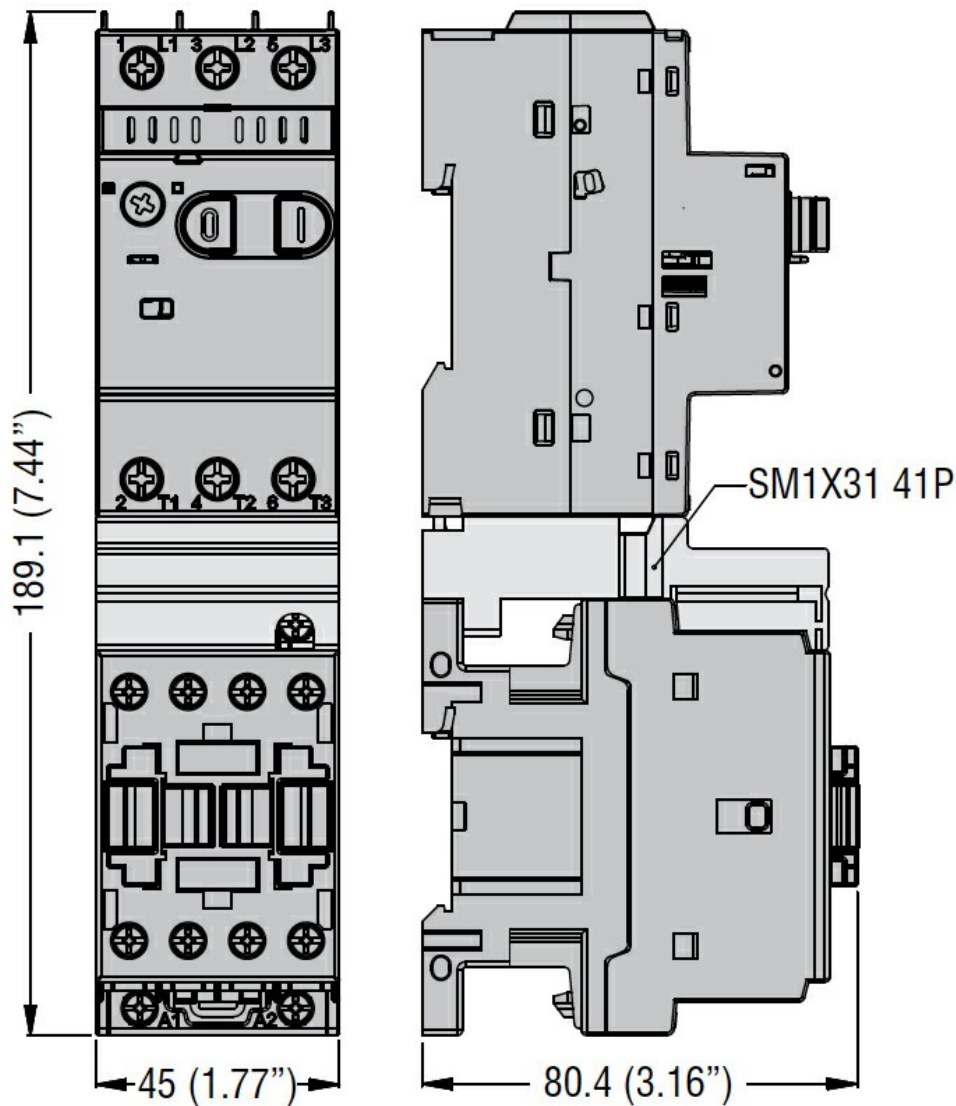

Certifications and compliance

Compliance

CSA C22.2 n° 14
 IEC/EN 60947-1
 IEC/EN 60947-5-1
 UL508

Certificates

cULus
 EAC

ETIM classification