



Rigid SM1
breaker-contactor
connections
SM1X
Rigid SM1R
breaker -
BF09..25D and
BF09...25L
contactor
connections.
SM1R...

Product designation

Product type designation

Description

Accessories for

Operational characteristics

IEC maximum current (I _{max})	A	25
---	---	----


Mechanical features

Operating position

normal	Other
--------	-------

Weight	g	44
--------	---	----

Dimensions

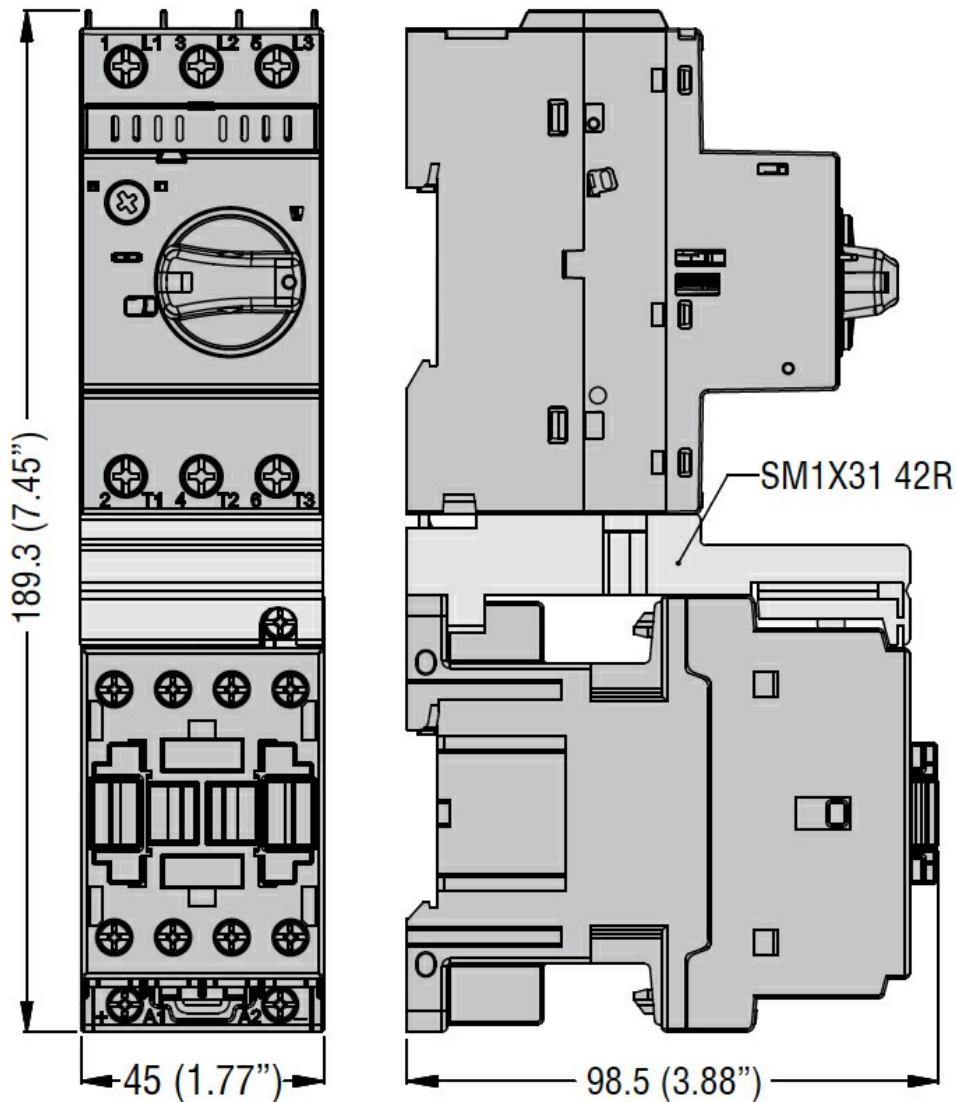

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification