



Rigid SM1
breaker-contactor
connections
SM1X
Rigid SM1R
breaker -
BF26..38A
contactor
connections.
SM1R...

Product designation

Product type designation

Description

Accessories for

Operational characteristics

IEC maximum current (I_{max})

A 38

Mechanical features

Operating position


normal

Other

Weight

g 45

Dimensions

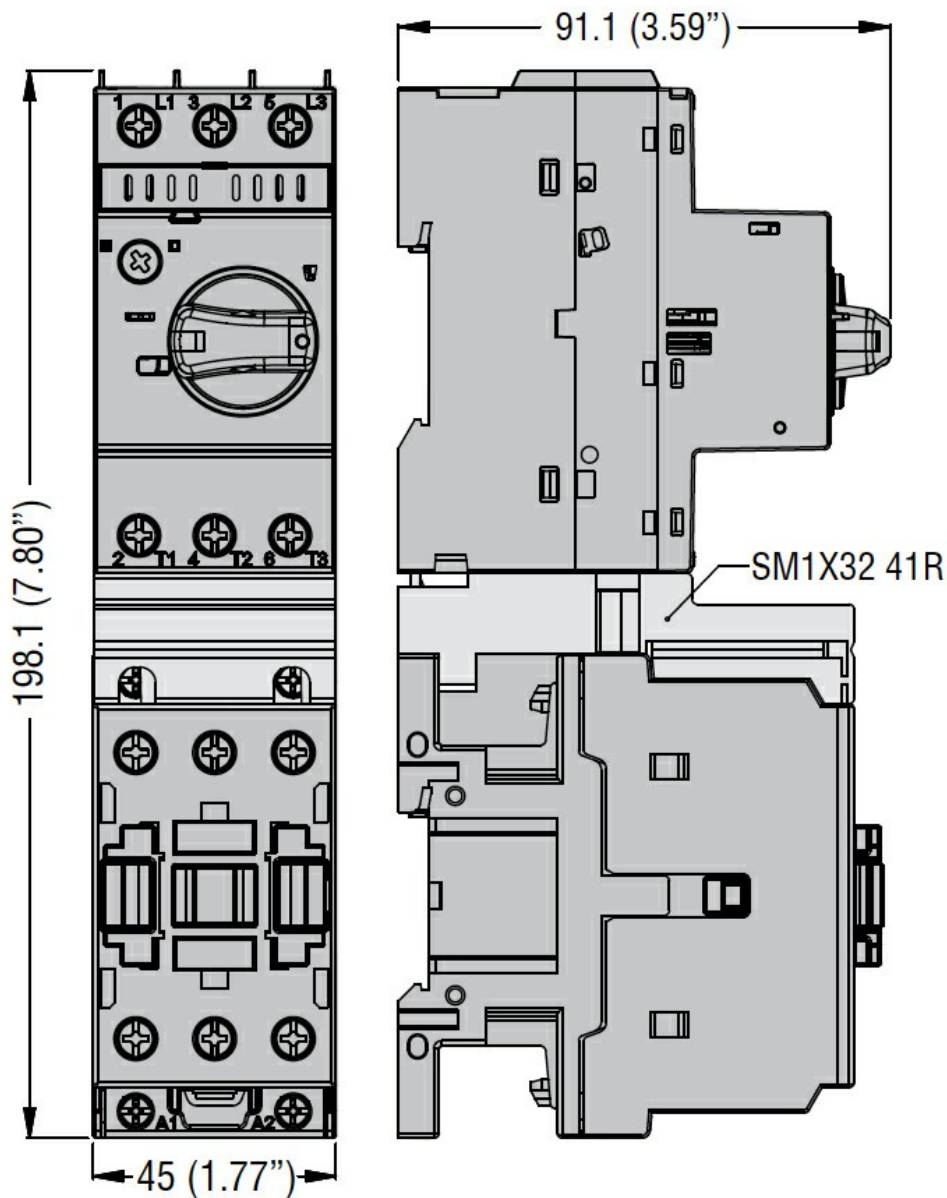

Certifications and compliance

Compliance

CSA C22.2 n° 14
 IEC/EN 60947-1
 IEC/EN 60947-5-1
 UL508

Certificates

cULus
 EAC

ETIM classification