

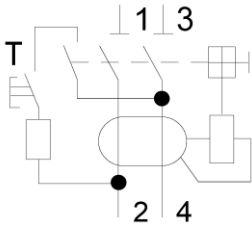
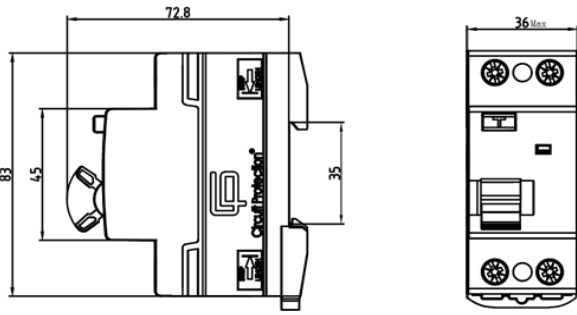



		BARCODE  5 060523 520022																																		
		Residual Current Device (RCD) RT0800302 																																		
TECHNICAL		CONNECTIONS																																		
<table border="1"> <tr> <th>Type</th> <td>RCD</td> </tr> <tr> <th>Standards</th> <td>BS EN 61008-1</td> </tr> <tr> <th>Pole</th> <td>2P, 3P + N</td> </tr> <tr> <th>Tripping Characteristics</th> <td></td> </tr> <tr> <th>Tripping Type</th> <td>Electro Magnetic</td> </tr> <tr> <th>Rated Breaking Capacity (Icu)</th> <td>6kA</td> </tr> <tr> <th>Rated Current</th> <td>25A, 40A, 63A, 80A 100A</td> </tr> <tr> <th>Rated Voltage (Un/AC)</th> <td>230/400V</td> </tr> <tr> <th>Residual Current Characteristics</th> <td>AC, S</td> </tr> <tr> <th>Rated Residual Operating Current (IΔn)</th> <td>0.03A, 0.1A, 0.3A</td> </tr> <tr> <th>Frequency (Hz)</th> <td>50/60Hz</td> </tr> <tr> <th>Mechanical Endurance</th> <td>4,000</td> </tr> <tr> <th>Protection Degree</th> <td>IP20</td> </tr> <tr> <th>Operating Temperature °C</th> <td>-25~ +40°C</td> </tr> <tr> <th>Storage Temperature °C</th> <td>-25~ +70°C</td> </tr> <tr> <th>Terminal Size (mm²)</th> <td>1 - 25</td> </tr> <tr> <th>Tightening Torque (Nm)</th> <td>2.5</td> </tr> </table>	Type	RCD	Standards	BS EN 61008-1	Pole	2P, 3P + N	Tripping Characteristics		Tripping Type	Electro Magnetic	Rated Breaking Capacity (Icu)	6kA	Rated Current	25A, 40A, 63A, 80A 100A	Rated Voltage (Un/AC)	230/400V	Residual Current Characteristics	AC, S	Rated Residual Operating Current (IΔn)	0.03A, 0.1A, 0.3A	Frequency (Hz)	50/60Hz	Mechanical Endurance	4,000	Protection Degree	IP20	Operating Temperature °C	-25~ +40°C	Storage Temperature °C	-25~ +70°C	Terminal Size (mm ²)	1 - 25	Tightening Torque (Nm)	2.5	2P RCD 	
Type	RCD																																			
Standards	BS EN 61008-1																																			
Pole	2P, 3P + N																																			
Tripping Characteristics																																				
Tripping Type	Electro Magnetic																																			
Rated Breaking Capacity (Icu)	6kA																																			
Rated Current	25A, 40A, 63A, 80A 100A																																			
Rated Voltage (Un/AC)	230/400V																																			
Residual Current Characteristics	AC, S																																			
Rated Residual Operating Current (IΔn)	0.03A, 0.1A, 0.3A																																			
Frequency (Hz)	50/60Hz																																			
Mechanical Endurance	4,000																																			
Protection Degree	IP20																																			
Operating Temperature °C	-25~ +40°C																																			
Storage Temperature °C	-25~ +70°C																																			
Terminal Size (mm ²)	1 - 25																																			
Tightening Torque (Nm)	2.5																																			
		DIMENSIONS 																																		
PRODUCT DATA																																				
PART NUMBER BARCODE DESCRIPTION VOLTAGE MAXIMUM LOAD TERMINAL CAPACITY STANDARD MATERIAL WEIGHT (1PC) Kg INNER CARTON QUANTITY OUTER CARTON QUANTITY ORIGIN OF MANUFACTURE	RT0800302 5060523520022 80A 30mA 2P RCD (AC) 230V 50/60Hz 80A 25mm ² BS EN 61008-1 PA6 (Nylon 6) 0.23 1 60 CHINA																																			
																																				
		CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk																																		
		Company Number 553729 VAT Number 258 7444 66																																		