

T80 Pro-Fit

Electric Shower

Product Codes

T80 Pro-Fit 7.5kW	SP8007PF
T80 Pro-Fit 8.5kW	SP8008PF
T80 Pro-Fit 9.5kW	SP8009PF
T80 Pro-Fit 10.5kW	SP8001PF

Installation

- Generous footprint will cover the original T80Z Fast-Fit as well as most competitor models
- 8 water and 8 cable entry points
- Easy pipe connection either left or right, copper or plastic, compression or popular push fit
- Wire free cover fit
- Dura-Flow™ heater can to reduce limescale build up perfect for hard water areas
- Easy fit entry trims which can be installed with the shower in situ, no tools required

Commissioning

- Simple 2 minute commissioning process

End User

- Separate flow and temperature controls
- Push-Button Start/Stop – Retains you preferred power and temperature setting
- Longer lasting shower - Uses Triton Dura-Flow™ technology to help reduce limescale
- Easy Clean 5 spray pattern shower head with removable spray plate

Flexible Shower Kit

- Longer length riser rail up to 620mm ideal for replacement installations
- Both fixing brackets are adjustable to fit any existing holes – no need drilling
- Longer 1.5m anti-twist Dura-Flow™ hose



T80 Pro-Fit

Electric Shower

Shower

Temperature stability	Stabilised
Power ratings	7.5kW, 8.5kW, 9.5kW, 10kW
Finish	White
Controls	Start/stop button & temperature control dial
Visual indicators	Power-on/low pressure indicator
Water connection	15mm compression fitting or push-fit
Terminal block	16mm ² max cable
Water supply	Mains cold water
Water pressure min	1bar (running at 8 l/min)
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)

Diagram Key:



Water Entry Points




Cable Entry Points

Dimensions:

H: 355mm

W: 230mm

D: 101mm

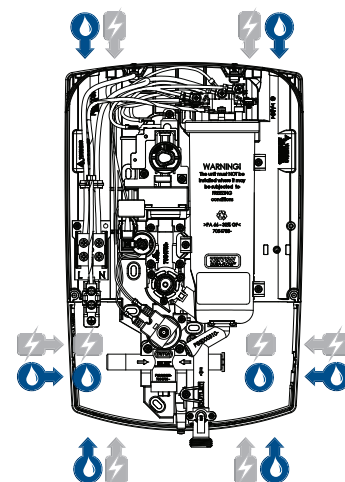

Riser Rail Kit

Standard version

Length	670mm
Diameter	22mm
Material	Stainless Steel
Finish	Polished
Hose	1.5m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this T80 Pro-Fit unit will aid optimum performance and keep the unit within the allocated guarantee period



Pro-Fit Riser Rail
TSKPROFITWC



Showerhead
(5 Spray Pattern)
TSHE8RCWHT



1.5m Anti-twist Hose - Chrome
REHOSE150C

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers