

STANDARD EDGE WIRING ACCESSORIES



These instructions should be read carefully and retained after installation for further reference and maintenance

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations [BS 7671] and current Building Regulations. If in any doubt, consult a qualified electrician.
- Before installation or maintenance, ensure that the mains supply is switched off and circuit fuses are removed or circuit breakers switched off
- Do not overload this accessory or subject it to conditions outside its rating
- Please recycle

Failure to install this product in accordance with the current edition of the IEE Wiring Regulations [BS 7671], improper use or removal of batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories Ltd does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

INSTALLATION

1. Connect the accessory as per the relevant installation diagram
2. All earth connections must be made and maintained. Use green/yellow sleeving on earth conductors that are not insulated.
3. Fit the unit into a suitable wall box taking care not to compress, damage or trap any cables, and secure with the screws provided
4. Check all electrical connections are secure with no loose strands of cable

PLATE FIXING

- Always ensure the wall surface is flat and smooth for optimum installation
- To maintain the finish of this product, periodically wipe over with a soft dry cloth only, do not use abrasive cleaning products

DIMMERS

- Please check with LED lamp manufacturer for compatibility.
- Our dimmers are rated 40-400W for incandescent loads


WIRING

- L – LIVE – Brown
- N – Neutral – Blue
- ⊕ – Earth – Green and yellow


WARRANTY

This product has a warranty of 15 years (3 years for dimmers and USB outlets) from the date of purchase. * Note – USB products should not be connected during an insulation resistance test or damage will occur IF IN ANY DOUBT PLEASE CONSULT A QUALIFIED ELECTRICIAN


1 WAY SWITCH




2 WAY SWITCH

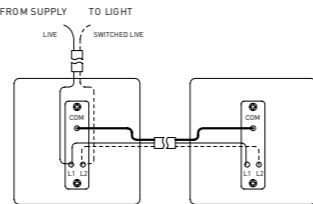


INTERMEDIATE SWITCH

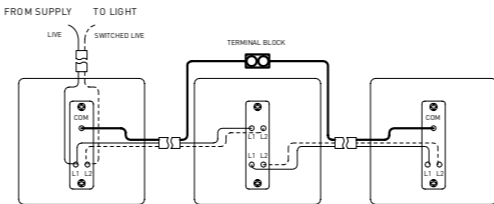

DIMMER




2 WAY DIMMER

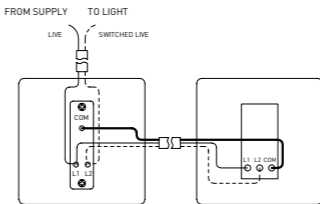


For multiple gang Dimmer (2, 3 & 4) repeat wiring method for each Dimmer


3-POLE FAN ISOLATOR SWITCH

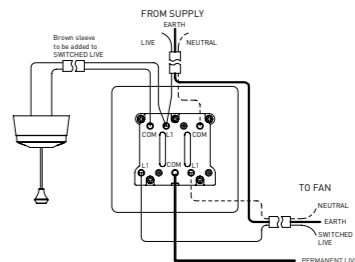


SHAVER SOCKET




13A 1G SWITCHED SOCKET




13A 2G SWITCHED SOCKET




13A 1G SOCKET WITH USB OUTLET




13A 2G SOCKET WITH USB OUTLET




13A 1G SOCKET




5A 1G SOCKET




FUSE CONNECTION UNIT




SWITCHED FUSE CONNECTION UNIT




20A SWITCH




20A FLEX OUTLET




45A SWITCH




COOKER CONTROL UNIT




45A COOKER OUTLET



TV SOCKET



BT SOCKET



Colour Code
Pin Colour
1 Green or Green/White
2 Blue or Blue/White
3 Orange or Orange/White
4 White or White/Orange
5 White or White/Blue
6 White or White/Green

Normally a maximum of 5 telephones can be connected to one exchange line. Any sockets are connected in parallel, i.e. Pin 1 to Pin 1; Pin 2 to Pin 2, etc.