

**GLS BULB B22 1521LM 13W 5000K NON-DIMM 240 BEAM FROSTED INTEGRAL**

ILGLSB22NF031



This 13W retro-fit Integral LED Classic Globe (GLS) (large bayonet base) delivers a cool white light and brightness. With a 1521 lumen output, this lamp is one of only a few true 100W filament bulb replacements available today. It features high output LEDs, an anti-glare refractor, all finished in an aluminium and plastic, thermally efficient body. Ideal for rooms with a single pendant fitting, living rooms, hallways and kitchens.

**Details**

<b>Barcode:</b>	5055788212683
<b>Quick Order Code:</b>	411280
<b>Category:</b>	Lamps
<b>Range Name:</b>	Everyday
<b>Product Type:</b>	GLS
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2

**Physical Data**

<b>Product Length (mm):</b>	118
<b>Product Width (mm):</b>	60
<b>Product Weight (g):</b>	50
<b>Material:</b>	Aluminium, Polycarbonate
<b>Base Term:</b>	Bayonet cap
<b>Bulb Base:</b>	B22
<b>Construction:</b>	Aluminium and Plastic heat-sink, Injection moulded diffuser
<b>Globe Finish:</b>	Frosted
<b>Globe Type:</b>	GLS
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	13
<b>Power Consumption (W) :</b>	13
<b>Power Factor:</b>	0.5, 0.7


Voltage Range (v):	220-240
Wattage equivalent (W):	40, 100
Amperage (mA):	95
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

## Light Data

Luminous Flux in Lumens (lm):	470, 1521
Luminous efficacy (lm/W):	117
Correlated Colour Temperature (CCT) (K):	5000
Colour Temperature:	5000 - Daylight
Colour Temperature Name:	Daylight
Beam Angle:	240
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	50000

## Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

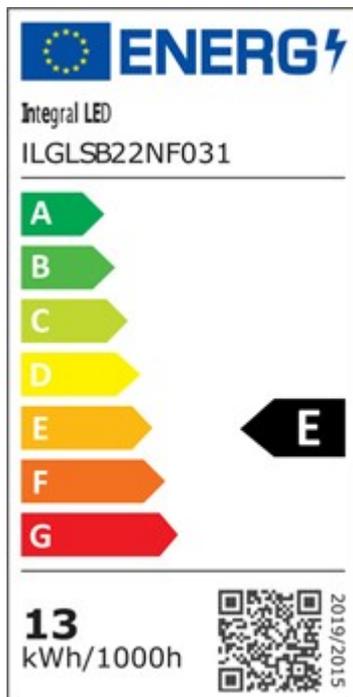

## Packaging

<b>Barcode:</b>	5055788212683
<b>Single box qty:</b>	1
<b>Package Weight (g):</b>	90
<b>Package Length (mm):</b>	130
<b>Package Width (mm):</b>	65
<b>Package Depth (mm):</b>	65
<b>Inner Carton Barcode:</b>	05055788212690
<b>Qty per Inner Carton :</b>	10
<b>Inner Carton Length (mm):</b>	335
<b>Inner Carton Width (mm):</b>	140
<b>Inner Carton Depth (mm):</b>	140
<b>Outer Carton Barcode:</b>	05055788268789
<b>Qty per Outer Carton:</b>	40
<b>Outer Carton Length (mm):</b>	580
<b>Outer Carton Width (mm):</b>	353
<b>Outer Carton Depth (mm):</b>	170
<b>Qty per euro pallet:</b>	1500, 1300