


Emergency Exit Box Slim 4W LED

Slim profile design alternative to standard exit boxes, Ideal for all industrial and commercial emergency lighting applications. Open areas, escape routes and exits.

- 3 hour emergency maintained or non-maintained operation
- Slim polycarbonate housing and interchangeable PVC legend panels
- Additional LED on base for downward illumination
- 20mm conduit entry points: Rear
- Manufactured in accordance to: BS EN 60598-2-22
- 4W LED
- IP Rating: IP20
- Colour temperature: 6000k
- Colour rendering index: >80
- Rated Life: 30,000 hours
- Operating temperature: -5°C to 40°C
- Supplied with ISO pictogram legend as standard: Arrow Up
- Legend maximum viewing distance: 30m
- Battery: Ni-Cd 3.6V 1200mAh
- Options available:
 - ISO directional pictogram PVC legends: Arrow Up, Arrow Down, Arrow Right, Arrow Left

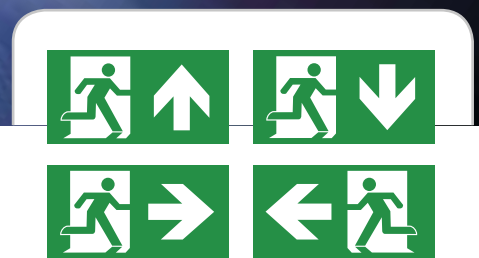

3 YEAR WARRANTY
LED
IP20
EM3 EMERGENCY 3 Hour Duration

Part No.	Description	Wattage	Measurement W x H x D	Viewing Distance	IP Rating	Colour Temperature
LXEEBS	Emergency Exit Box Slim LED	4W	390x190x30mm	30m	IP20	6000K
Accessories						
LXEEBS/L/AU	Legend Arrow Up	-	365x170x0.5mm	30m	PVC ISO pictogram - Direction Up	
LXEEBS/L/AD	Legend Arrow Down	-	365x170x0.5mm	30m	PVC ISO pictogram - Direction Down	
LXEEBS/L/AR	Legend Arrow Right	-	365x170x0.5mm	30m	PVC ISO pictogram - Direction Right	
LXEEBS/L/AL	Legend Arrow Left	-	365x170x0.5mm	30m	PVC ISO pictogram - Direction Left	



Email sales@luxna.co.uk



Web luxna-lighting.com