


Emergency Hanging Sign Multi-Mount 3W LED

Surface multi-mount position, slim profile hanging exit sign, Ideal for all commercial, Leisure and Hospitality emergency lighting applications. Open areas, escape routes and exits.

- 3 hour emergency maintained or non-maintained
- First fix plate and hinged base for wall or ceiling mounting
- Polycarbonate and aluminium housing with interchangeable PVC legends
- Double sided fixed acrylic legend panel
- Test function button and LED indicator
- Push-fit terminal connector
- Manufactured in accordance to: BS EN 60598-2-22
- 3W LED
- IP Rating: IP20
- Colour temperature: 6000k
- Colour rendering index: >80
- Rated Life: 30,000 hours
- Operating temperature: -5°C to 40°C
- Supplied with ISO pictogram legend as standard: Arrow Up
- Legend maximum viewing distance: 24m
- Battery: Ni-Cd 3.6V 900mAh
- Options available:
 - ISO directional pictogram PVC legends: Arrow Up, Arrow Down, Arrow Left / Right
 - Mounting accessory: Side arm wall bracket

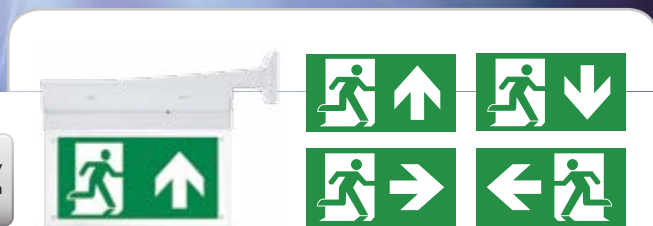


3 YEAR WARRANTY

LED

IP20

EM3 EMERGENCY
3 Hour Duration



Part No.	Description	Wattage	Measurement W x H x D	Viewing Distance	IP Rating	Colour Temperature
LXEMME	Emergency Multi-Mount Sign LED	3W	300x233x35mm	24m	IP20	6000K
Accessories						
LXEMME/SMA	Side Mounting Arm	-	375x80x68mm	-	Wall Bracket For Side Mounting	
LXEMME/L/AU	Legend Arrow Up	-	300x155x0.5mm	24m	PVC ISO pictogram - Direction Up (2pcs)	
LXEMME/L/AD	Legend Arrow Down	-	300x155x0.5mm	24m	PVC ISO pictogram - Direction Down (2pcs)	
LXEMME/L/ALR	Legend Arrow Left/Right	-	300x155x0.5mm	24m	PVC ISO pictogram - Direction Left/Right (2pcs)	



Email sales@luxna.co.uk




Web luxna-lighting.com

Emergency Hanging Sign Multi-Mount 3W LED

Surface multi-mount position, slim profile hanging exit sign, Ideal for all commercial, Leisure and Hospitality emergency lighting applications. Open areas, escape routes and exits.

- 3 hour emergency maintained or non-maintained
- First fix plate and hinged base for wall or ceiling mounting
- Polycarbonate and aluminium housing with interchangeable PVC legends
- Double sided fixed acrylic legend panel
- Test function button and LED indicator
- Push-fit terminal connector
- Manufactured in accordance to: BS EN 60598-2-22
- 3W LED
- IP Rating: IP20
- Colour temperature: 6000k
- Colour rendering index: >80
- Rated Life: 30,000 hours
- Operating temperature: -5°C to 40°C
- Supplied with ISO pictogram legend as standard: Arrow Up
- Legend maximum viewing distance: 24m
- Battery: Ni-Cd 3.6V 900mAh
- Options available:
 - ISO directional pictogram PVC legends: Arrow Up, Arrow Down, Arrow Left / Right
 - Mounting accessory: Side arm wall bracket

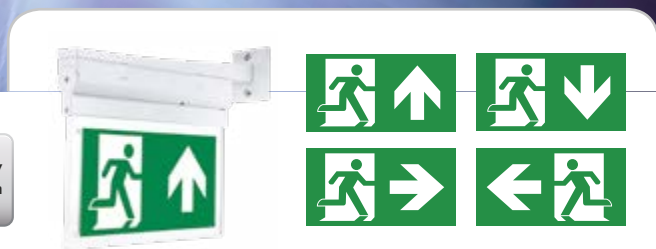

3 YEAR
WARRANTY

LED

IP20

EM3 EMERGENCY
3 Hour Duration

Part No.	Description	Wattage	Measurement W x H x D	Viewing Distance	IP Rating	Colour Temperature
LXEMME	Emergency Multi-Mount Sign LED	3W	300x233x35mm	24m	IP20	6000K
Accessories						
LXEMME/SMA	Side Mounting Arm	-	375x80x68mm	-	Wall Bracket For Side Mounting	
LXEMME/L/AU	Legend Arrow Up	-	300x155x0.5mm	24m	PVC ISO pictogram - Direction Up (2pcs)	
LXEMME/L/AD	Legend Arrow Down	-	300x155x0.5mm	24m	PVC ISO pictogram - Direction Down (2pcs)	
LXEMME/L/ALR	Legend Arrow Left/Right	-	300x155x0.5mm	24m	PVC ISO pictogram - Direction Left/Right (2pcs)	



Email sales@luxna.co.uk



Web luxna-lighting.com